



**Miller**<sup>®</sup>  
*The Power of Blue.*

**OM-1315**

January 1997

Eff. w/Serial Number KH303568

#### Processes




Gas Metal Arc (MIG) Welding  
Flux Cored Arc (FCAW)  
Welding

#### Description



Arc Welding Power Source and Wire  
Feeder

# Millermatic<sup>®</sup> 250MP

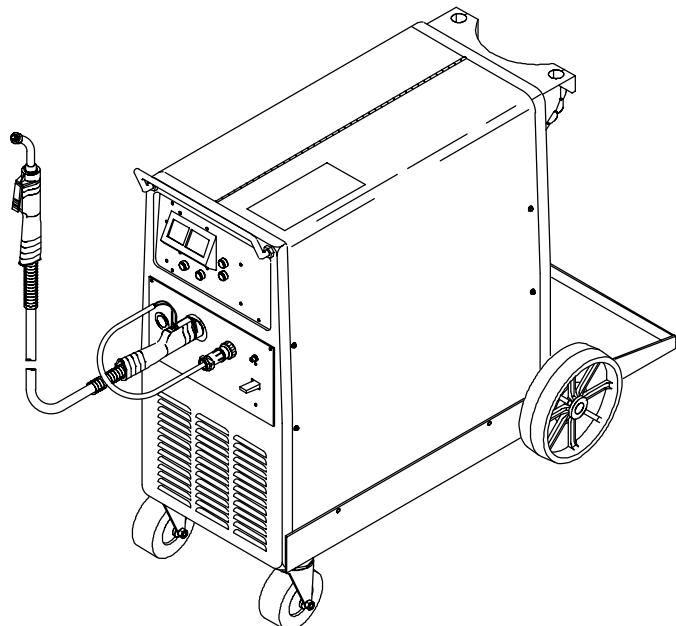

Visit our website at  
[www.MillerWelds.com](http://www.MillerWelds.com)

**OWNER'S MANUAL**

# From Miller to You

Thank you and congratulations on choosing Miller. Now you can get the job done and get it done right. We know you don't have time to do it any other way.

That's why when Niels Miller first started building arc welders in 1929, he made sure his products offered long-lasting value and superior quality. Like you, his customers couldn't afford anything less. Miller products had to be more than the best they could be. They had to be the best you could buy.

Today, the people that build and sell Miller products continue the tradition. They're just as committed to providing equipment and service that meets the high standards of quality and value established in 1929.

This Owner's Manual is designed to help you get the most out of your Miller products. Please take time to read the Safety precautions. They will help you protect yourself against potential hazards on the worksite. We've made installation and operation quick and easy.

With Miller you can count on years of reliable service with proper maintenance. And if for some reason the unit needs repair, there's a Troubleshooting section that will help you figure out what the problem is. The parts list will then help you to decide which exact part you may need to fix the problem. Warranty and service information for your particular model are also provided.



Miller is the first welding equipment manufacturer in the U.S.A. to be registered to the ISO 9001 Quality System Standard.

Miller Electric manufactures a full line of welders and welding related equipment. For information on other quality Miller products, contact your local Miller distributor to receive the latest full line catalog or individual catalog sheets. **To locate your nearest distributor or service agency call 1-800-4-A-Miller, or visit us at [www.MillerWelds.com](http://www.MillerWelds.com) on the web.**



Working as hard as you do – every power source from Miller is backed by the most hassle-free warranty in the business.



Miller offers a Technical Manual which provides more detailed service and parts information for your unit. To obtain a Technical Manual, contact your local distributor. Your distributor can also supply you with Welding Process Manuals such as SMAW, GTAW, GMAW, and GMAW-P.

# TABLE OF CONTENTS

---

The following terms are used interchangeably throughout this manual:  
MIG = GMAW

<b>SECTION 1 – SAFETY PRECAUTIONS - READ BEFORE USING .....</b>	<b>1</b>
1-1. Symbol Usage .....	1
1-2. Arc Welding Hazards .....	1
1-3. Additional Symbols for Installation, Operation, and Maintenance .....	3
1-4. Principal Safety Standards .....	3
1-5. EMF Information .....	4
<b>SECTION 2 – INSTALLATION .....</b>	<b>5</b>
2-1. Specifications .....	5
2-2. Duty Cycle And Overheating .....	5
2-3. Volt-Ampere Curves .....	6
2-4. Installing Work Clamp .....	6
2-5. Installing Welding Gun .....	7
2-6. Setting Gun Polarity For Wire Type .....	7
2-7. Installing Gas Supply .....	7
2-8. Installing Drive Roll And Wire Inlet Guide .....	8
2-9. Installing Wire Spool And Adjusting Hub Tension .....	8
2-10. Positioning Jumper Links .....	8
2-11. Electrical Service Guide .....	9
2-12. Selecting A Location And Connecting Input Power .....	9
2-13. Threading Welding Wire .....	10
<b>SECTION 3 – OPERATION .....</b>	<b>11</b>
3-1. Controls .....	11
3-2. Installing Receptacle Module For Use With A Spool Gun (Optional) .....	11
<b>SECTION 4 – PROGRAMMING THE MICROPROCESSOR .....</b>	<b>12</b>
4-1. Mode Selection Button .....	12
4-2. Parameter Select Button .....	13
4-3. Parameter Increase And Decrease Buttons .....	13
4-4. Weld Mode .....	14
4-5. Timer Mode .....	14
4-6. Dual Schedule Mode And Gun Switches .....	15
4-7. Material Mode .....	15
4-8. Setting Language, Wire Speed Units, And Burnback .....	16
4-9. Using One Switch To Control Voltage And Wire Speed (Synergic Welding) .....	17
4-10. Resetting Memory .....	17
<b>SECTION 5 – MAINTENANCE AND TROUBLESHOOTING .....</b>	<b>18</b>
5-1. Routine Maintenance .....	18
5-2. Circuit Breaker CB1 .....	18
5-3. Unit Overload .....	18
5-4. Replacing Gun Contact Tip .....	19
5-5. Aligning Drive Rolls And Wire Guide .....	19
5-6. Unicable Repair .....	19
5-7. Cleaning Or Replacing Gun Liner .....	20
5-8. Replacing Switch And/Or Head Tube .....	21
5-9. Troubleshooting .....	22
5-10. Selftest Procedure .....	23
5-11. Troubleshooting Displays .....	24
<b>SECTION 6 – ELECTRICAL DIAGRAM .....</b>	<b>25</b>
<b>SECTION 7 – PARTS LIST .....</b>	<b>26</b>
<b>OPTIONS AND ACCESSORIES</b>	
<b>WARRANTY</b>	



# SECTION 1 – SAFETY PRECAUTIONS - READ BEFORE USING

som\_nd\_5/97

## 1-1. Symbol Usage



Means Warning! Watch Out! There are possible hazards with this procedure! The possible hazards are shown in the adjoining symbols.



▲ Marks a special safety message.

□ Means "Note"; not safety related.

## 1-2. Arc Welding Hazards

- ▲ The symbols shown below are used throughout this manual to call attention to and identify possible hazards. When you see the symbol, watch out, and follow the related instructions to avoid the hazard. The safety information given below is only a summary of the more complete safety information found in the Safety Standards listed in Section 1-4. Read and follow all Safety Standards.
- ▲ Only qualified persons should install, operate, maintain, and repair this unit.
- ▲ During operation, keep everybody, especially children, away.



### ELECTRIC SHOCK can kill.


Touching live electrical parts can cause fatal shocks or severe burns. The electrode and work circuit is electrically live whenever the output is on. The input power circuit and machine internal circuits are also live when power is on. In semiautomatic or automatic wire welding, the wire, wire reel, drive roll housing, and all metal parts touching the welding wire are electrically live. Incorrectly installed or improperly grounded equipment is a hazard.

- Do not touch live electrical parts.
- Wear dry, hole-free insulating gloves and body protection.
- Insulate yourself from work and ground using dry insulating mats or covers big enough to prevent any physical contact with the work or ground.
- Do not use AC output in damp areas, if movement is confined, or if there is a danger of falling.
- Use AC output ONLY if required for the welding process.
- If AC output is required, use remote output control if present on unit.
- Disconnect input power or stop engine before installing or servicing this equipment. Lockout/tagout input power according to OSHA 29 CFR 1910.147 (see Safety Standards).
- Properly install and ground this equipment according to its Owner's Manual and national, state, and local codes.
- Always verify the supply ground – check and be sure that input power cord ground wire is properly connected to ground terminal in disconnect box or that cord plug is connected to a properly grounded receptacle outlet.
- When making input connections, attach proper grounding conductor first – double-check connections.
- Frequently inspect input power cord for damage or bare wiring – replace cord immediately if damaged – bare wiring can kill.
- Turn off all equipment when not in use.
- Do not use worn, damaged, undersized, or poorly spliced cables.
- Do not drape cables over your body.

- If earth grounding of the workpiece is required, ground it directly with a separate cable – do not use work clamp or work cable.
- Do not touch electrode if you are in contact with the work, ground, or another electrode from a different machine.
- Use only well-maintained equipment. Repair or replace damaged parts at once. Maintain unit according to manual.
- Wear a safety harness if working above floor level.
- Keep all panels and covers securely in place.
- Clamp work cable with good metal-to-metal contact to workpiece or worktable as near the weld as practical.
- Insulate work clamp when not connected to workpiece to prevent contact with any metal object.
- Do not connect more than one electrode or work cable to any single weld output terminal.

### SIGNIFICANT DC VOLTAGE exists after removal of input power on inverters.

- Turn Off inverter, disconnect input power, and discharge input capacitors according to instructions in Maintenance Section before touching any parts.



### FUMES AND GASES can be hazardous.

Welding produces fumes and gases. Breathing these fumes and gases can be hazardous to your health.

- Keep your head out of the fumes. Do not breathe the fumes.
- If inside, ventilate the area and/or use exhaust at the arc to remove welding fumes and gases.
- If ventilation is poor, use an approved air-supplied respirator.
- Read the Material Safety Data Sheets (MSDSs) and the manufacturer's instructions for metals, consumables, coatings, cleaners, and degreasers.
- Work in a confined space only if it is well ventilated, or while wearing an air-supplied respirator. Always have a trained watchperson nearby. Welding fumes and gases can displace air and lower the oxygen level causing injury or death. Be sure the breathing air is safe.
- Do not weld in locations near degreasing, cleaning, or spraying operations. The heat and rays of the arc can react with vapors to form highly toxic and irritating gases.
- Do not weld on coated metals, such as galvanized, lead, or cadmium plated steel, unless the coating is removed from the weld area, the area is well ventilated, and if necessary, while wearing an air-supplied respirator. The coatings and any metals containing these elements can give off toxic fumes if welded.



### ARC RAYS can burn eyes and skin.

Arc rays from the welding process produce intense visible and invisible (ultraviolet and infrared) rays that can burn eyes and skin. Sparks fly off from the weld.


- Wear a welding helmet fitted with a proper shade of filter to protect your face and eyes when welding or watching (see ANSI Z49.1 and Z87.1 listed in Safety Standards).
- Wear approved safety glasses with side shields under your helmet.
- Use protective screens or barriers to protect others from flash and glare; warn others not to watch the arc.
- Wear protective clothing made from durable, flame-resistant material (leather and wool) and foot protection.



### WELDING can cause fire or explosion.

Welding on closed containers, such as tanks, drums, or pipes, can cause them to blow up. Sparks can fly off from the welding arc. The flying sparks, hot workpiece, and hot equipment can cause fires and burns. Accidental contact of electrode to metal objects can cause sparks, explosion, overheating, or fire. Check and be sure the area is safe before doing any welding.

- Protect yourself and others from flying sparks and hot metal.
- Do not weld where flying sparks can strike flammable material.
- Remove all flammables within 35 ft (10.7 m) of the welding arc. If this is not possible, tightly cover them with approved covers.
- Be alert that welding sparks and hot materials from welding can easily go through small cracks and openings to adjacent areas.
- Watch for fire, and keep a fire extinguisher nearby.
- Be aware that welding on a ceiling, floor, bulkhead, or partition can cause fire on the hidden side.
- Do not weld on closed containers such as tanks, drums, or pipes, unless they are properly prepared according to AWS F4.1 (see Safety Standards).
- Connect work cable to the work as close to the welding area as practical to prevent welding current from traveling long, possibly unknown paths and causing electric shock and fire hazards.
- Do not use welder to thaw frozen pipes.
- Remove stick electrode from holder or cut off welding wire at contact tip when not in use.
- Wear oil-free protective garments such as leather gloves, heavy shirt, cuffless trousers, high shoes, and a cap.
- Remove any combustibles, such as a butane lighter or matches, from your person before doing any welding.



### FLYING METAL can injure eyes.

- Welding, chipping, wire brushing, and grinding cause sparks and flying metal. As welds cool, they can throw off slag.
- Wear approved safety glasses with side shields even under your welding helmet.



### BUILDDUP OF GAS can injure or kill.

- Shut off shielding gas supply when not in use.
- Always ventilate confined spaces or use approved air-supplied respirator.




### HOT PARTS can cause severe burns.

- Do not touch hot parts bare handed.
- Allow cooling period before working on gun or torch.



### MAGNETIC FIELDS can affect pacemakers.


- Pacemaker wearers keep away.
- Wearers should consult their doctor before going near arc welding, gouging, or spot welding operations.



### NOISE can damage hearing.

Noise from some processes or equipment can damage hearing.

- Wear approved ear protection if noise level is high.



### CYLINDERS can explode if damaged.

Shielding gas cylinders contain gas under high pressure. If damaged, a cylinder can explode. Since gas cylinders are normally part of the welding process, be sure to treat them carefully.


- Protect compressed gas cylinders from excessive heat, mechanical shocks, slag, open flames, sparks, and arcs.
- Install cylinders in an upright position by securing to a stationary support or cylinder rack to prevent falling or tipping.
- Keep cylinders away from any welding or other electrical circuits.
- Never drape a welding torch over a gas cylinder.
- Never allow a welding electrode to touch any cylinder.
- Never weld on a pressurized cylinder – explosion will result.
- Use only correct shielding gas cylinders, regulators, hoses, and fittings designed for the specific application; maintain them and associated parts in good condition.
- Turn face away from valve outlet when opening cylinder valve.
- Keep protective cap in place over valve except when cylinder is in use or connected for use.
- Read and follow instructions on compressed gas cylinders, associated equipment, and CGA publication P-1 listed in Safety Standards.

## 1-3. Additional Symbols for Installation, Operation, and Maintenance




### FIRE OR EXPLOSION hazard.

- Do not install or place unit on, over, or near combustible surfaces.
- Do not install unit near flammables.
- Do not overload building wiring – be sure power supply system is properly sized, rated, and protected to handle this unit.




### FALLING UNIT can cause injury.

- Use lifting eye to lift unit only, NOT running gear, gas cylinders, or any other accessories.
- Use equipment of adequate capacity to lift and support unit.
- If using lift forks to move unit, be sure forks are long enough to extend beyond opposite side of unit.



### OVERUSE can cause OVERHEATING

- Allow cooling period; follow rated duty cycle.
- Reduce current or reduce duty cycle before starting to weld again.
- Do not block or filter airflow to unit.



### STATIC (ESD) can damage PC boards.

- Put on grounded wrist strap BEFORE handling boards or parts.
- Use proper static-proof bags and boxes to store, move, or ship PC boards.



### MOVING PARTS can cause injury.

- Keep away from moving parts.
- Keep away from pinch points such as drive rolls.




### WELDING WIRE can cause injury.

- Do not press gun trigger until instructed to do so.
- Do not point gun toward any part of the body, other people, or any metal when threading welding wire.




### MOVING PARTS can cause injury.

- Keep away from moving parts such as fans.
- Keep all doors, panels, covers, and guards closed and securely in place.



### H.F. RADIATION can cause interference.

- High-frequency (H.F.) can interfere with radio navigation, safety services, computers, and communications equipment.
- Have only qualified persons familiar with electronic equipment perform this installation.
- The user is responsible for having a qualified electrician promptly correct any interference problem resulting from the installation.
- If notified by the FCC about interference, stop using the equipment at once.
- Have the installation regularly checked and maintained.
- Keep high-frequency source doors and panels tightly shut, keep spark gaps at correct setting, and use grounding and shielding to minimize the possibility of interference.



### ARC WELDING can cause interference.

- Electromagnetic energy can interfere with sensitive electronic equipment such as computers and computer-driven equipment such as robots.
- Be sure all equipment in the welding area is electromagnetically compatible.
- To reduce possible interference, keep weld cables as short as possible, close together, and down low, such as on the floor.
- Locate welding operation 100 meters from any sensitive electronic equipment.
- Be sure this welding machine is installed and grounded according to this manual.
- If interference still occurs, the user must take extra measures such as moving the welding machine, using shielded cables, using line filters, or shielding the work area.

## 1-4. Principal Safety Standards

*Safety in Welding and Cutting*, ANSI Standard Z49.1, from American Welding Society, 550 N.W. LeJeune Rd, Miami FL 33126

*Safety and Health Standards*, OSHA 29 CFR 1910, from Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

*Recommended Safe Practices for the Preparation for Welding and Cutting of Containers That Have Held Hazardous Substances*, American Welding Society Standard AWS F4.1, from American Welding Society, 550 N.W. LeJeune Rd, Miami, FL 33126

*National Electrical Code*, NFPA Standard 70, from National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.

*Safe Handling of Compressed Gases in Cylinders*, CGA Pamphlet P-1, from Compressed Gas Association, 1235 Jefferson Davis Highway, Suite 501, Arlington, VA 22202.

*Code for Safety in Welding and Cutting*, CSA Standard W117.2, from Canadian Standards Association, Standards Sales, 178 Rexdale Boulevard, Rexdale, Ontario, Canada M9W 1R3.

*Safe Practices For Occupation And Educational Eye And Face Protection*, ANSI Standard Z87.1, from American National Standards Institute, 1430 Broadway, New York, NY 10018.

*Cutting And Welding Processes*, NFPA Standard 51B, from National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.

## 1-5. EMF Information

### Considerations About Welding And The Effects Of Low Frequency Electric And Magnetic Fields

Welding current, as it flows through welding cables, will cause electromagnetic fields. There has been and still is some concern about such fields. However, after examining more than 500 studies spanning 17 years of research, a special blue ribbon committee of the National Research Council concluded that: "The body of evidence, in the committee's judgment, has not demonstrated that exposure to power-frequency electric and magnetic fields is a human-health hazard." However, studies are still going forth and evidence continues to be examined. Until the final conclusions of the research are reached, you may wish to minimize your exposure to electromagnetic fields when welding or cutting.

To reduce magnetic fields in the workplace, use the following procedures:

1. Keep cables close together by twisting or taping them.
2. Arrange cables to one side and away from the operator.
3. Do not coil or drape cables around your body.
4. Keep welding power source and cables as far away from operator as practical.
5. Connect work clamp to workpiece as close to the weld as possible.

### About Pacemakers:

Pacemaker wearers consult your doctor first. If cleared by your doctor, then following the above procedures is recommended.


# SECTION 2 – INSTALLATION

## 2-1. Specifications


Rated Output		Max. Open-Circuit Voltage	Amps Input at Rated Output, 50 or 60 Hz, Single-Phase								
			200 V	220 V	230 V	380 V	415 V	460 V	575 V	KVA	KW
250 A at 28 VDC, 40% Duty Cycle	200 A at 28 VDC, 60% Duty Cycle	32	50 2.3*	45 2.2*	44 2*	26 1.3*	24 1.2*	22 1*	18 0.8*	10 0.46*	7.7 0.13*
Wire Type and Diameter									Wire Feed Speed	Dimensions	Net Weight
Solid Steel  .023 – .045 in (0.6 – 1.2 mm)	Stainless Steel  .023 – .035 in (0.6 – 0.9 mm)	Flux Cored	50–670 IPM (1.2–1.7 m/min)			H: 37 in (940 mm) W: 19 in (483 mm) D: 30-1/4 in (768 mm)			225 lb (102 kg)		

\* While idling

## 2-2. Duty Cycle And Overheating

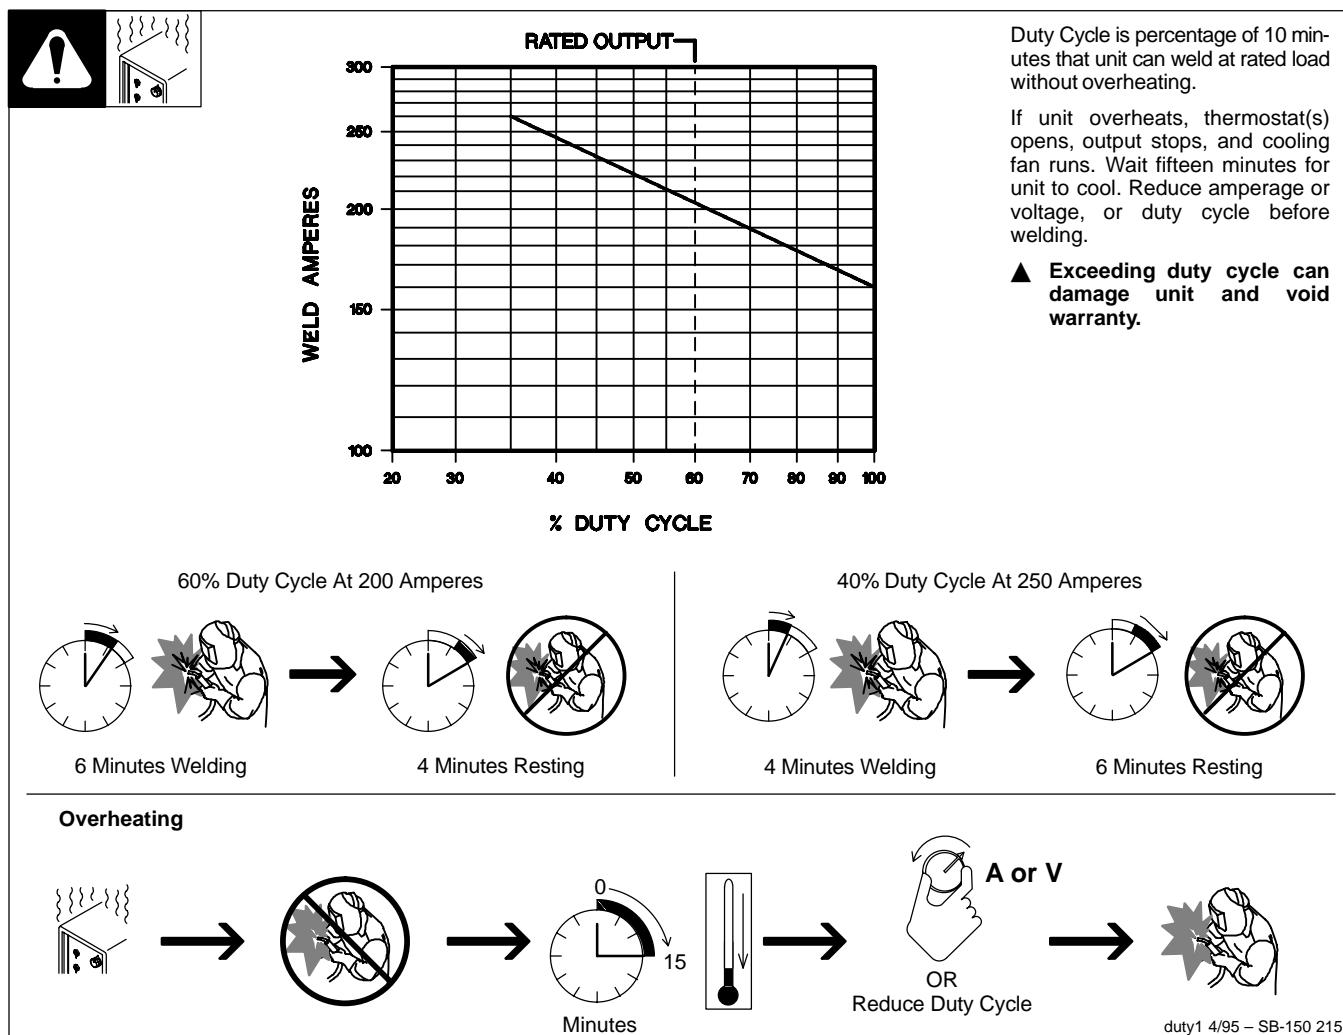


## 2-3. Volt-Ampere Curves

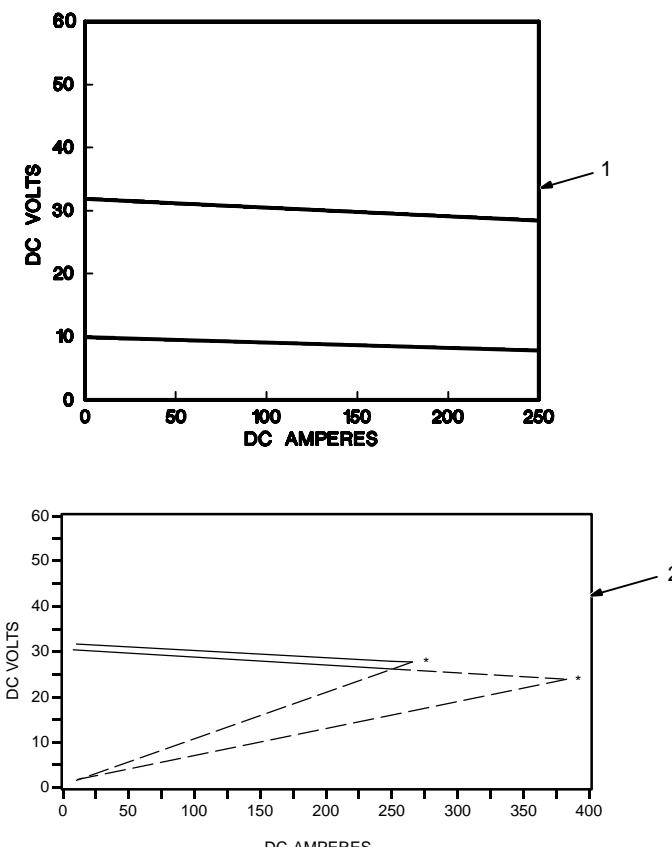

\*Approximate shutdown voltage/amperage points shown for reference only.

ssb1.1 10/91 – SB-144 925 / S-0700

## 2-4. Installing Work Clamp

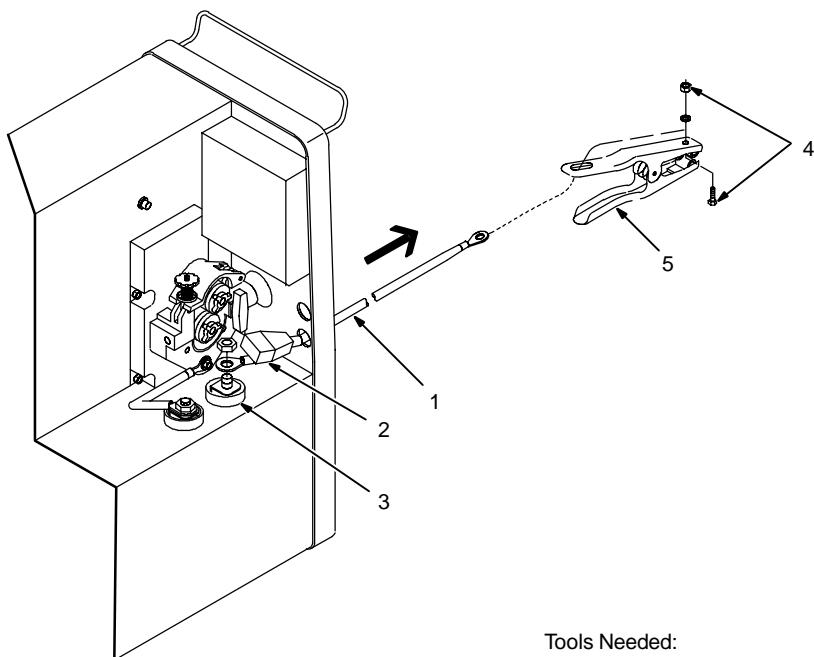

1 Work Cable

2 Boot

Slide boot onto work cable. Route cable out front panel opening from inside.

3 Negative (-) Output Terminal  
Connect cable to terminal and cover connection with boot.

4 Hardware

5 Work Clamp

Route cable through clamp handle and secure as shown.


Close door.

Tools Needed:


1/2, 3/4 in

ST-150 228-E


## 2-5. Installing Welding Gun

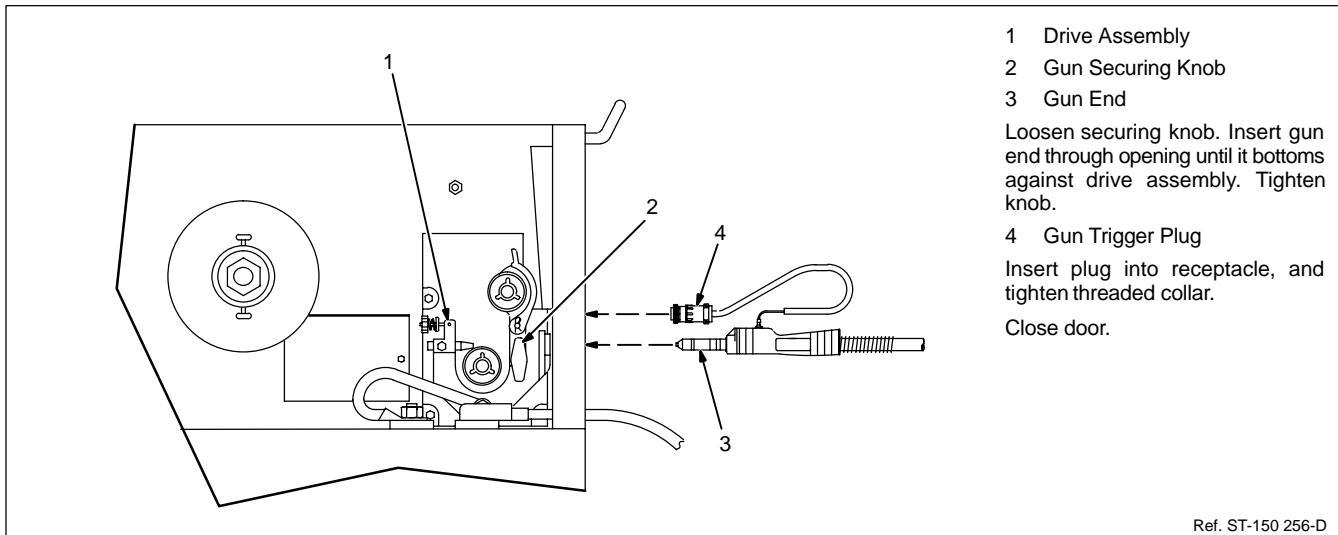


## 2-6. Setting Gun Polarity For Wire Type

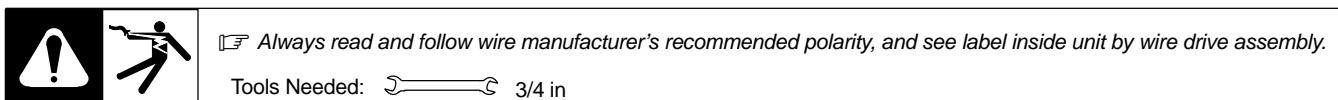


## 2-7. Installing Gas Supply

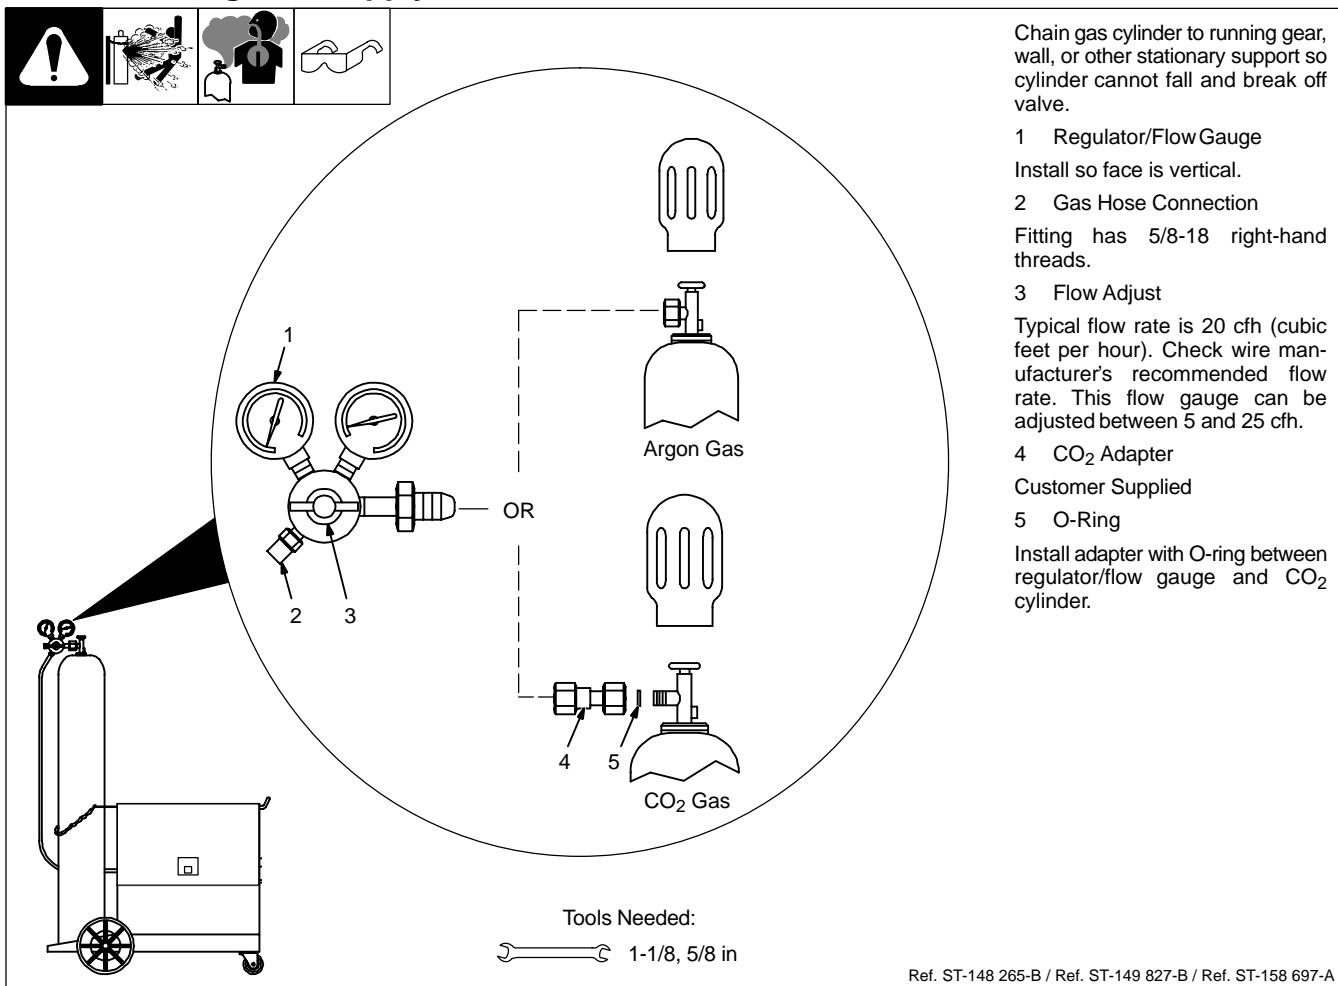


## 2-8. Installing Drive Roll And Wire Inlet Guide

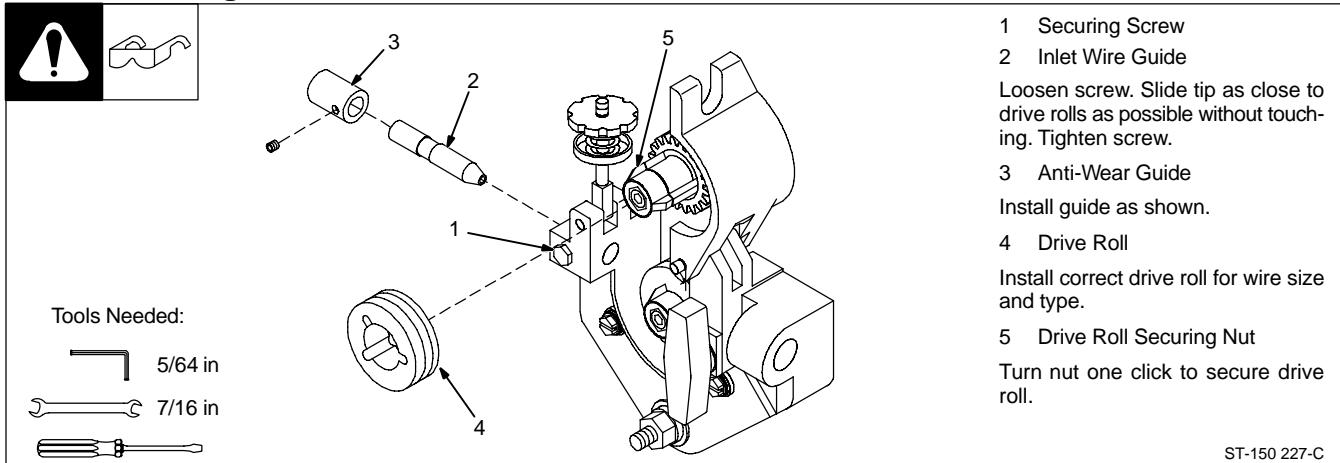

## 2-9. Installing Wire Spool And Adjusting Hub Tension

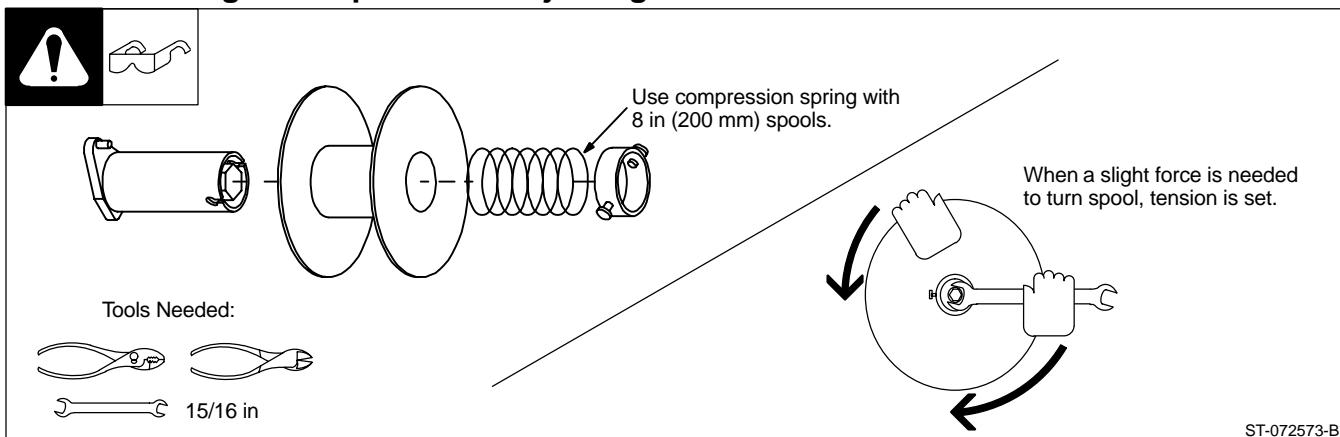

## 2-10. Positioning Jumper Links

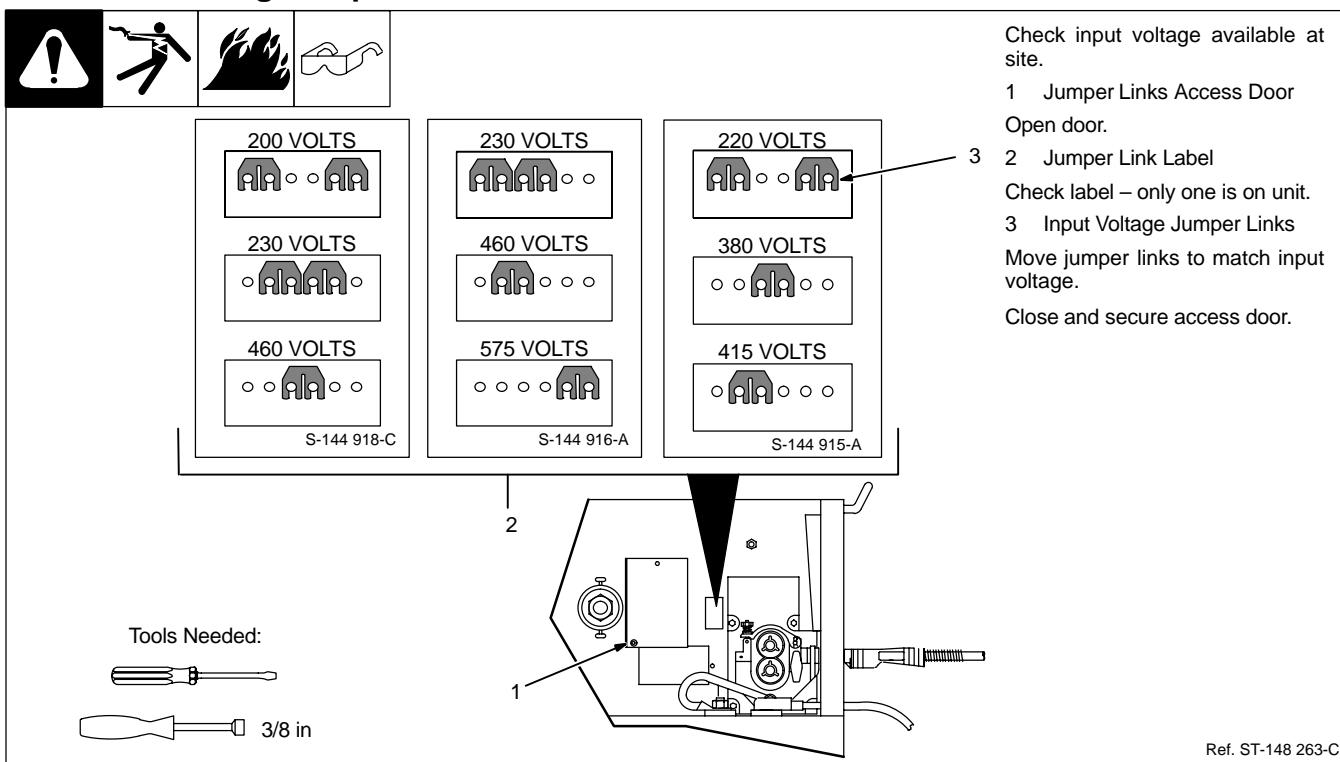


## 2-11. Electrical Service Guide

<b>Input Voltage</b>	200	220	230	380	415	460	575
<b>Input Amperes At Rated Output</b>	50	45	44	26	24	22	17
<b>Max Recommended Standard Fuse Or Circuit Breaker Rating In Amperes</b>	80	70	70	40	35	35	25
<b>Min Input Conductor Size In AWG/Kcmil</b>	8	10	8	12	12	10	12
<b>Max Recommended Input Conductor Length In Feet (Meters)</b>	93 (28)	75 (23)	124 (38)	137 (42)	163 (50)	329 (100)	313 (95)
<b>Min Grounding Conductor Size In AWG/Kcmil</b>	8	10	8	12	12	10	12


Reference: 1996 National Electrical Code (NEC)

S-0092-J

## 2-12. Selecting A Location And Connecting Input Power

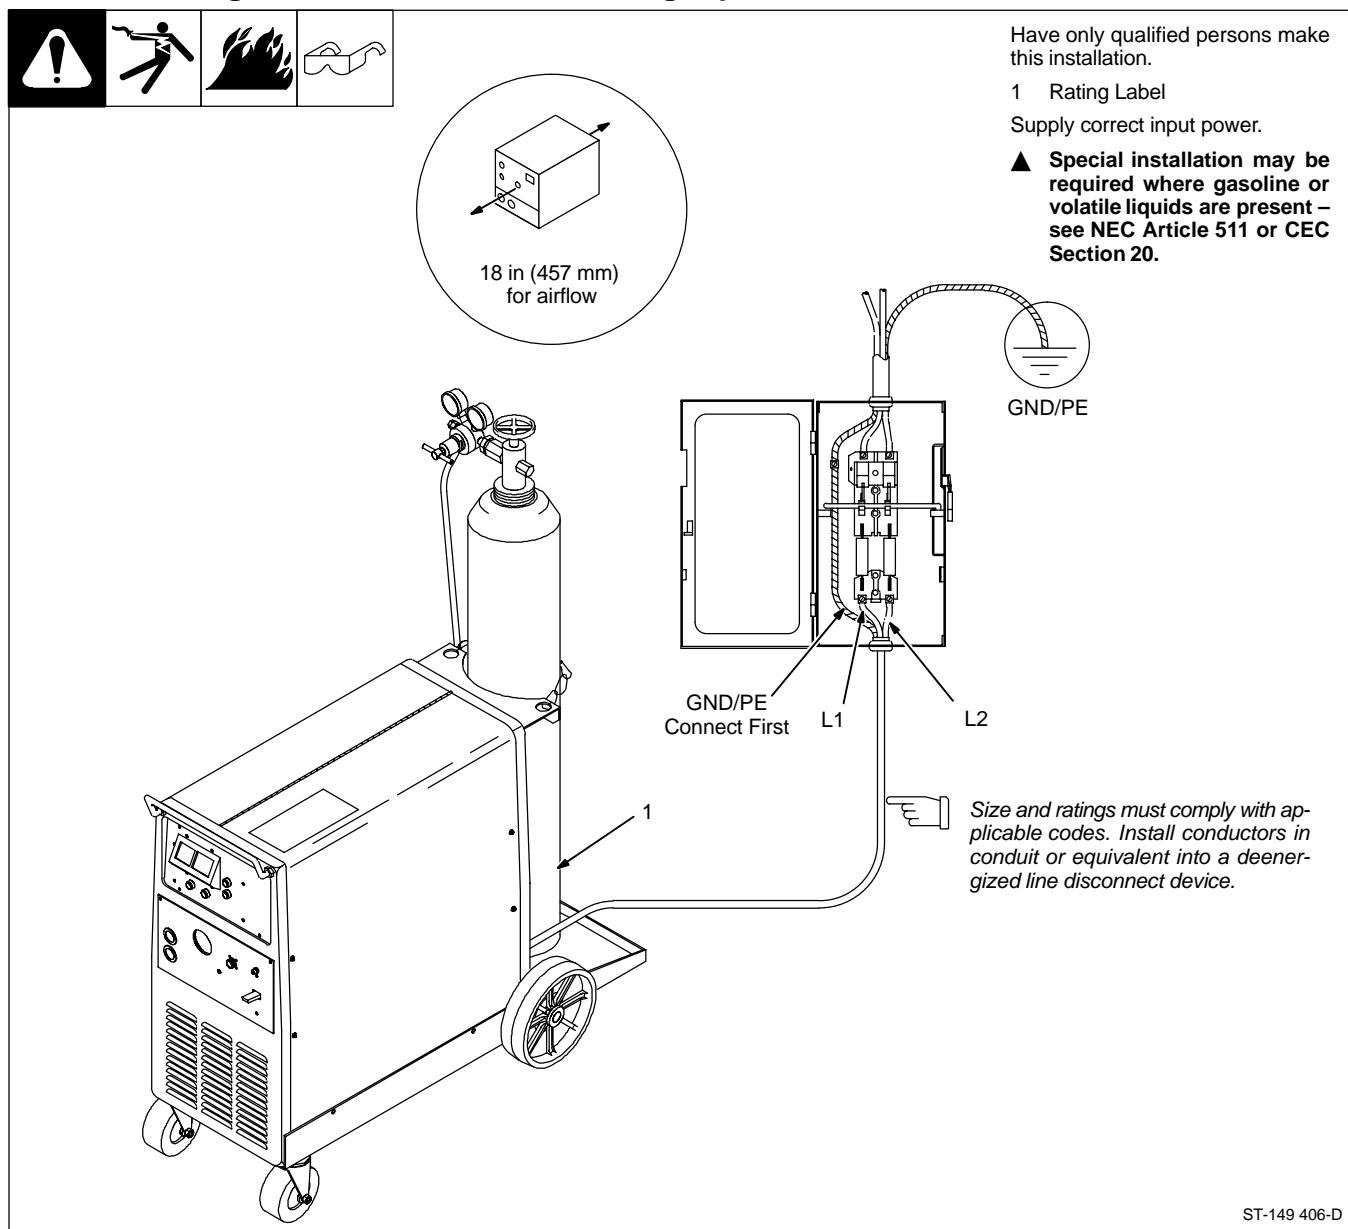


## 2-13. Threading Welding Wire

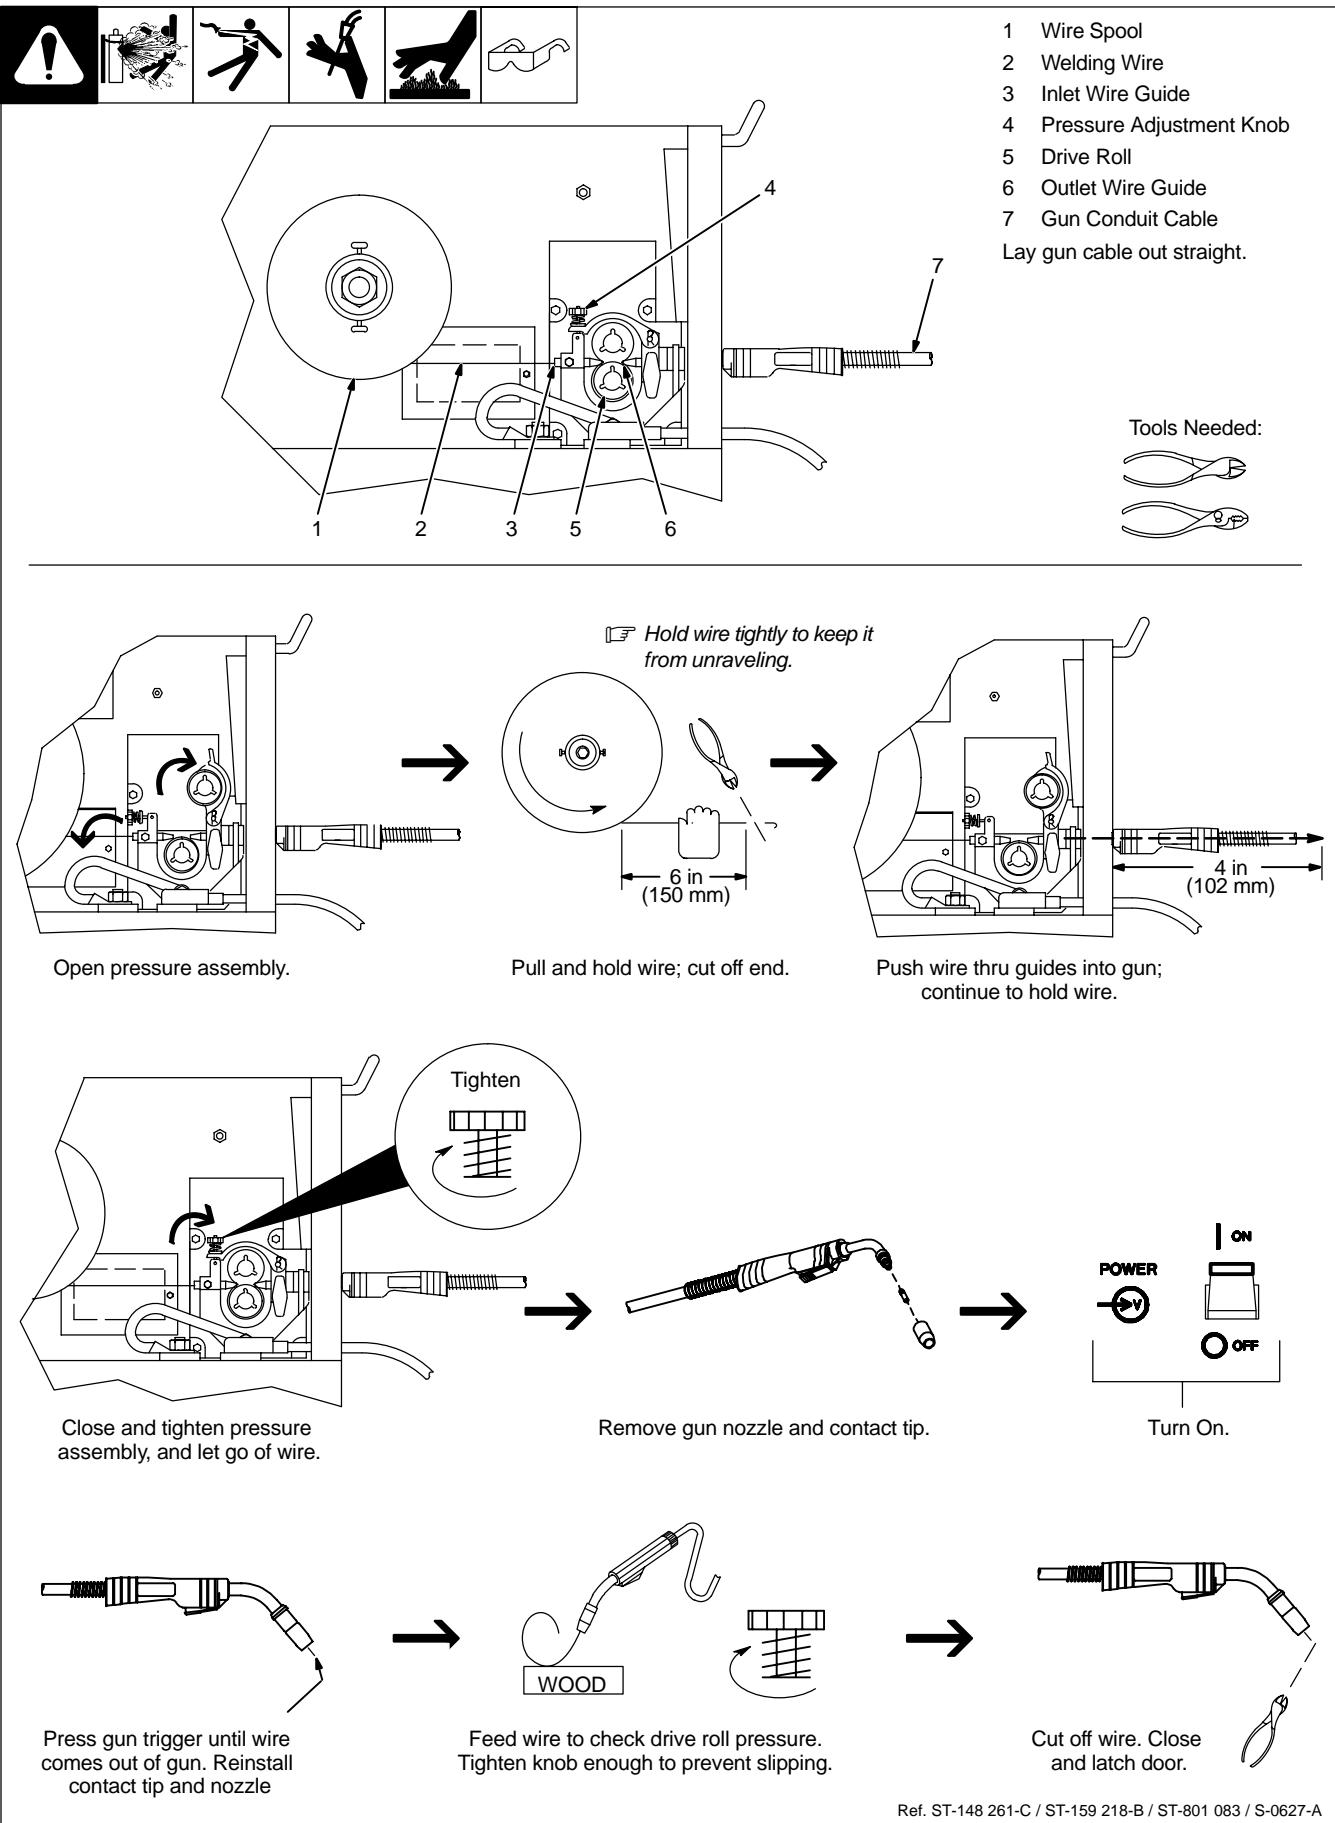


# SECTION 3 – OPERATION

## 3-1. Controls

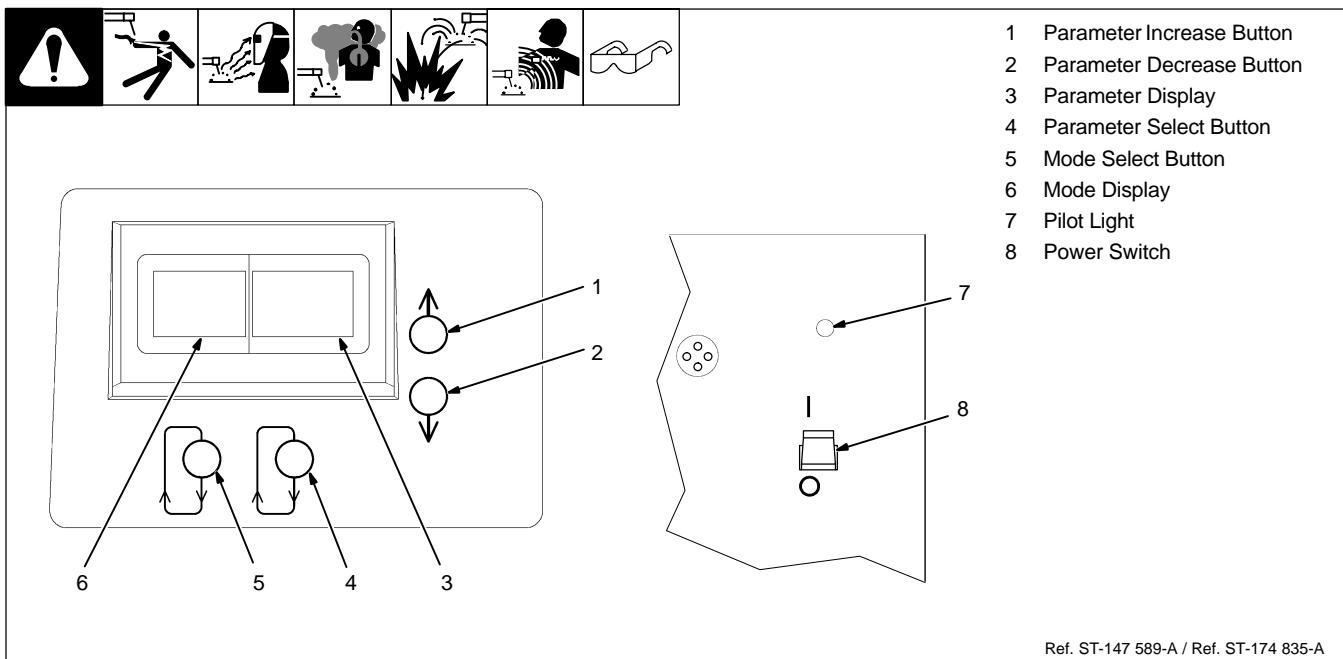

## 3-2. Installing Receptacle Module For Use With A Spool Gun (Optional)

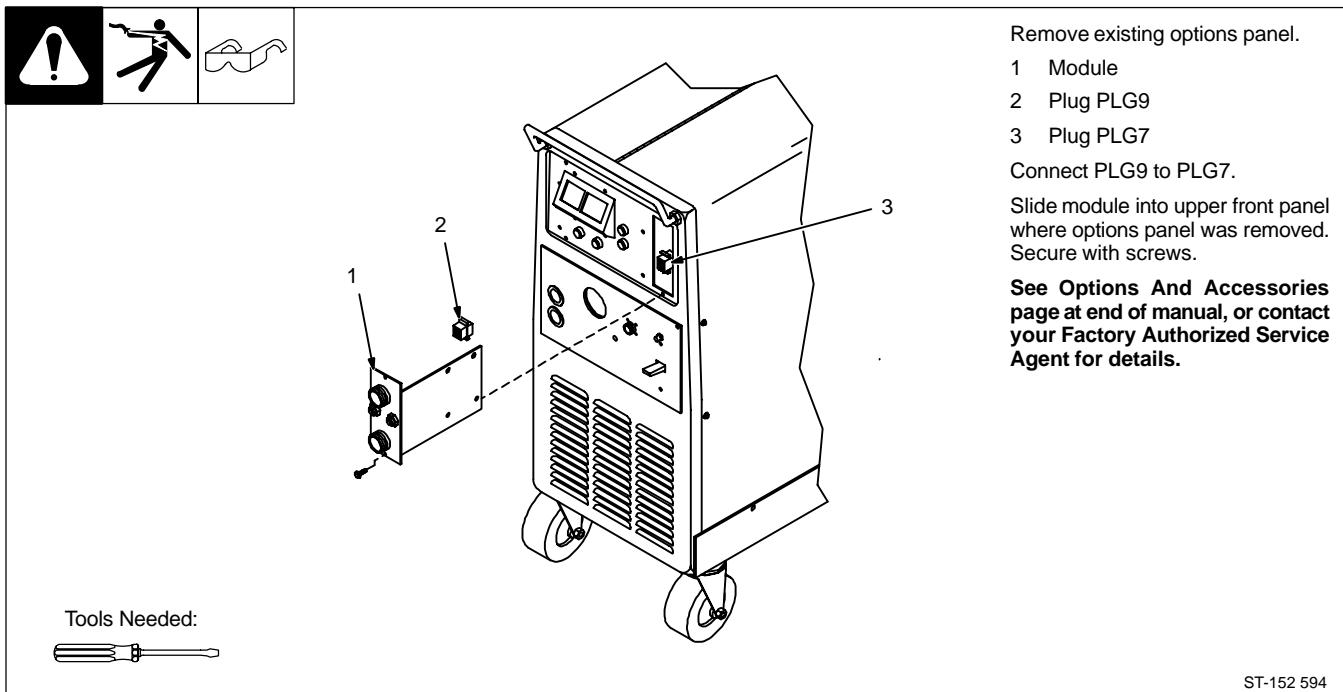


# SECTION 4 – PROGRAMMING THE MICROPROCESSOR


## NOTE

Experiment with the microprocessor. If you have difficulties, reset the unit according to Section 4-10, and unit returns to original factory settings.


### 4-1. Mode Selection Button

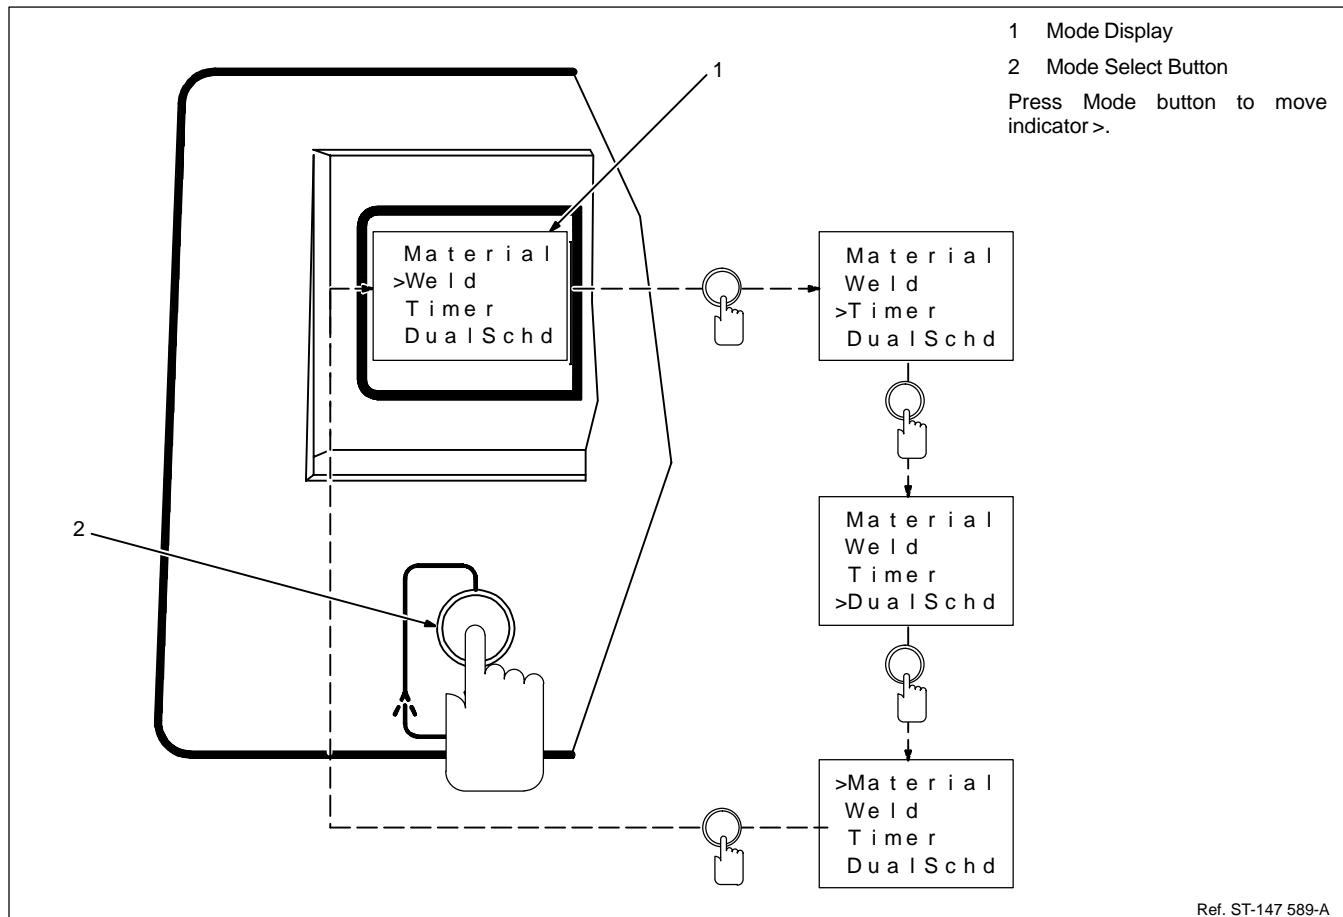


## 4-2. Parameter Select Button

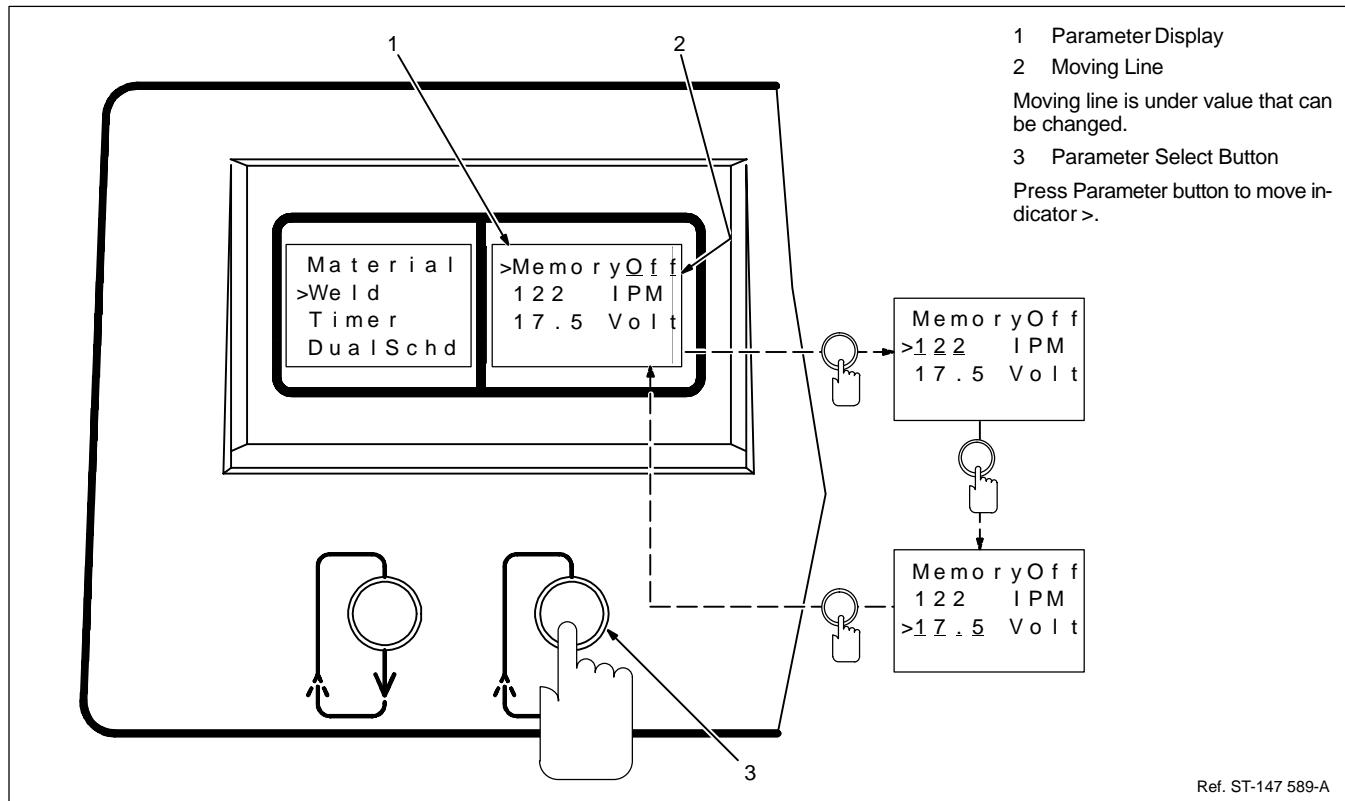

## 4-3. Parameter Increase And Decrease Buttons

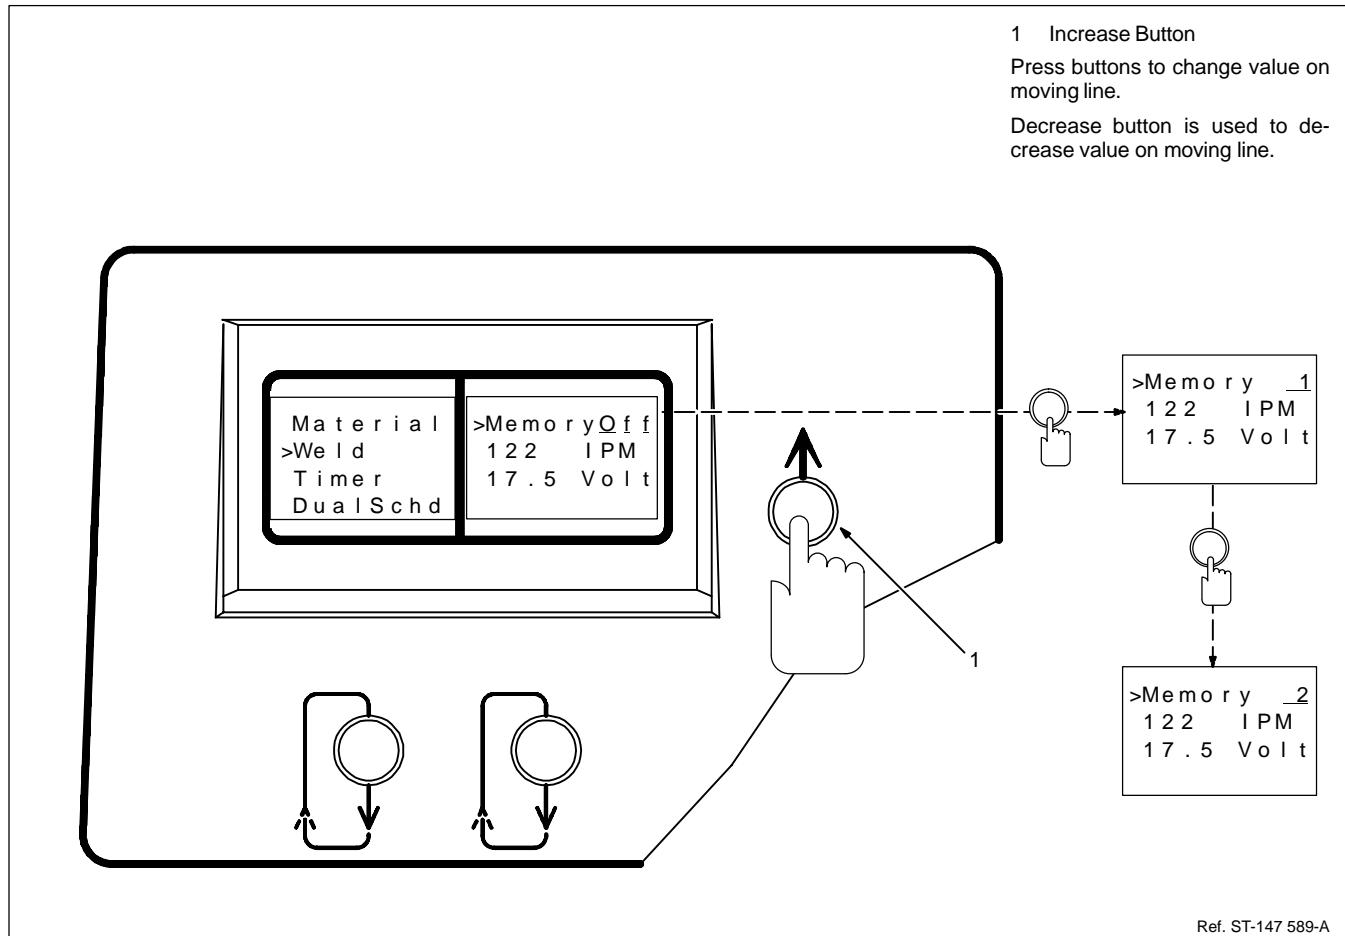

#### 4-4. Weld Mode

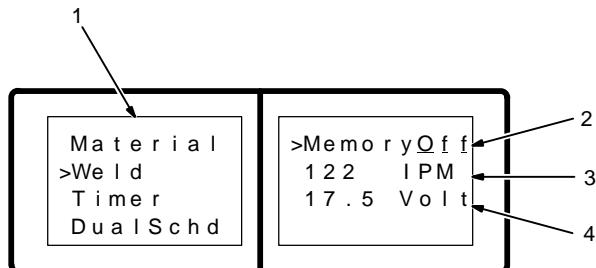

##### 1 Weld Mode

Select Weld to set wire speed and volts. Unit must be in Weld mode to select program Memory number.

##### 2 Memory

Memory can store up to 9 weld programs. On power up, "Memory Off" is displayed. Values are a copy of last weld program used.

Value changes in "Memory Off" do not affect other programs.

##### 3 Wire Speed

Value can be set between 50 and 670 ipm (1.3 to 17.0 mpm).


Use the Increase/Decrease buttons or gun switch to change values.

##### 4 Volts

Value can be set between 10.0 and 32.0 volts.

Use the Increase/Decrease buttons or gun switch to change values.

#### 4-5. Timer Mode

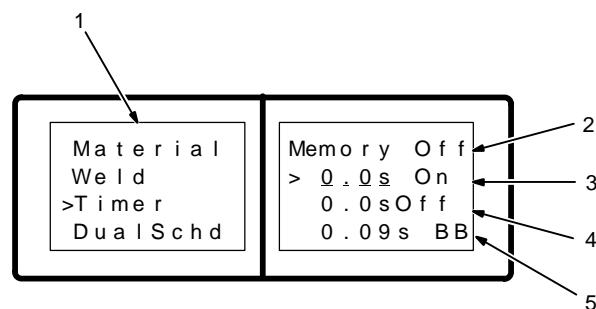

##### 1 Timer Mode

Select Timer to set spot, skip, or burnback time.

##### 2 Memory

Memory displays number set in Weld mode.

##### 3 On Time (Spot Time)

Value can be set between 0.1 and 30.0 seconds.

##### 4 Off Time


Value can be set between 0.5 and 30.0 seconds.

Skip welds use both on and off time.


##### 5 Burnback

Value can be set between 0.00 and 0.25 seconds when unit is configured for burnback (see Section 4-8).


## 4-6. Dual Schedule Mode And Gun Switches

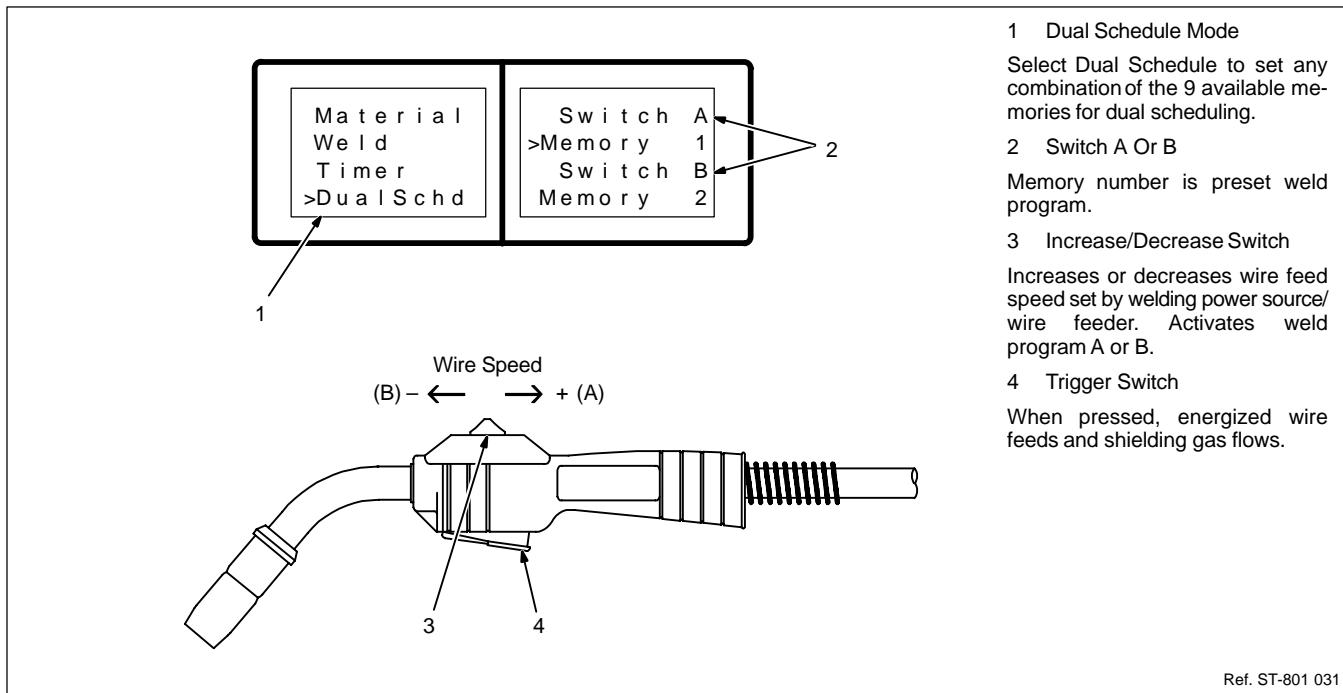


## 4-7. Material Mode

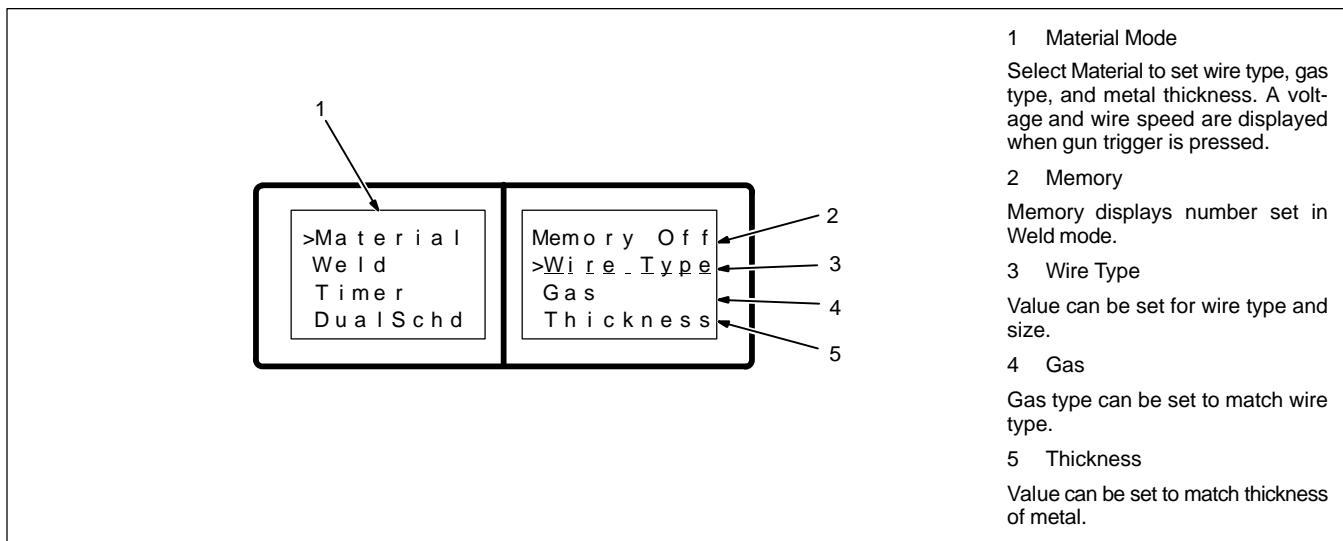


## 4-8. Setting Language, Wire Speed Units, And Burnback

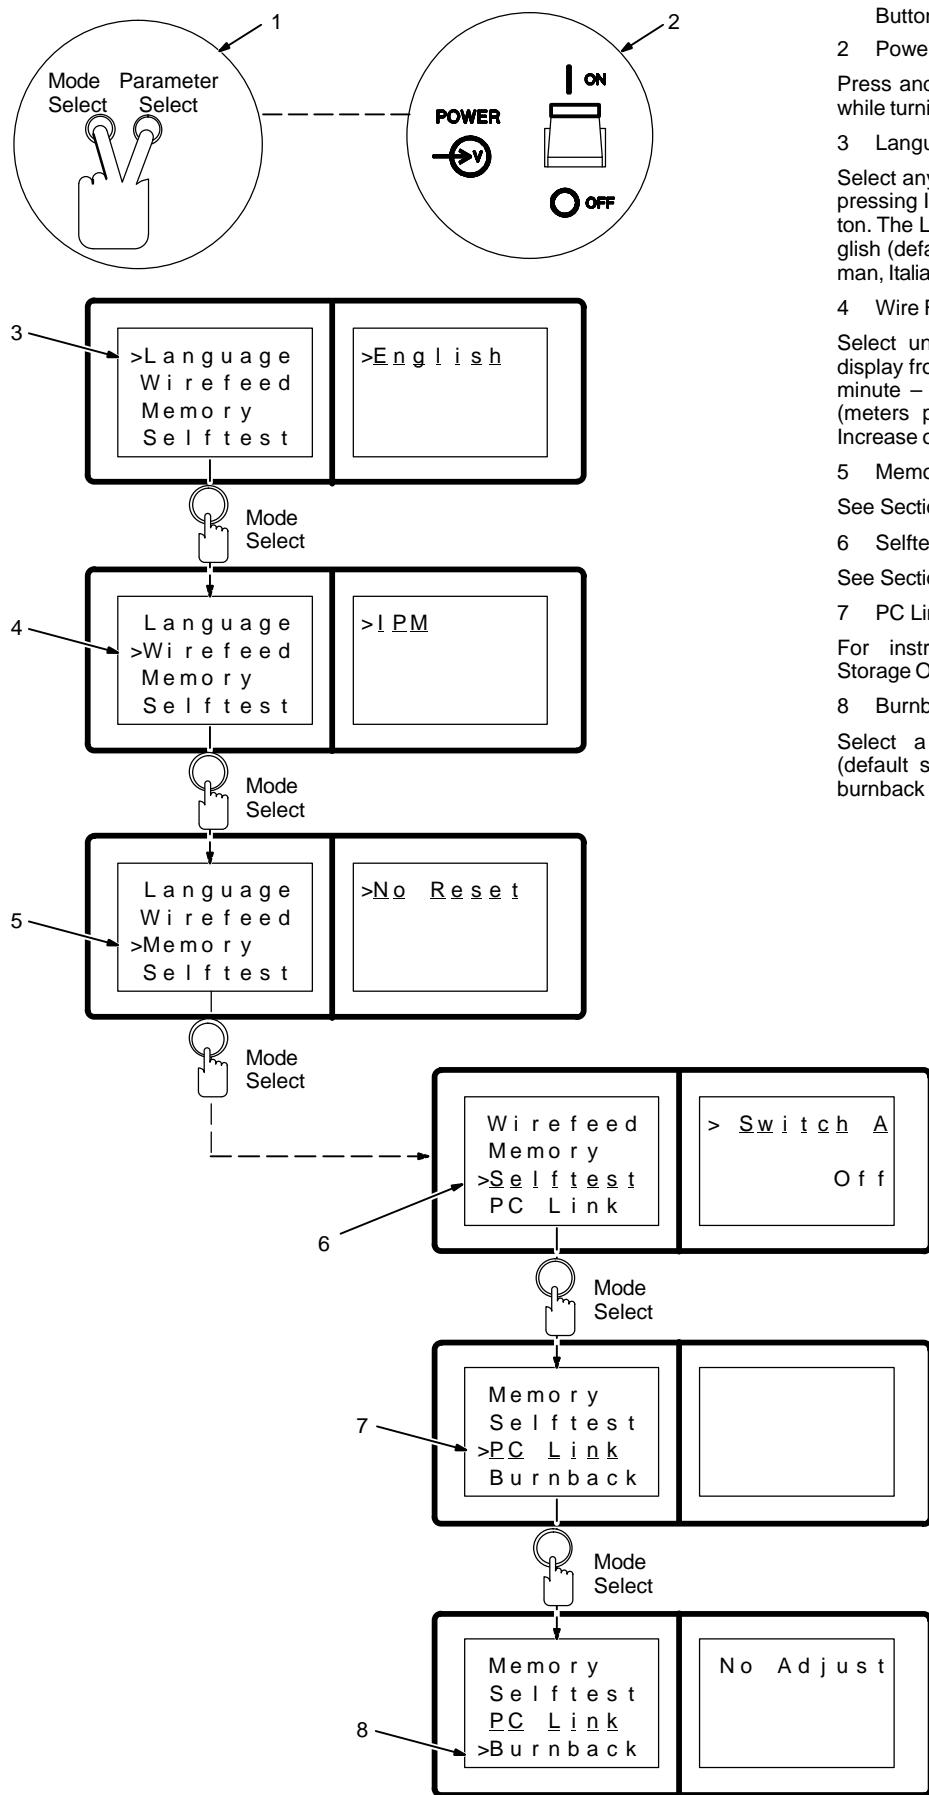

#### 4-9. Using One Switch To Control Voltage And Wire Speed (Synergic Welding)

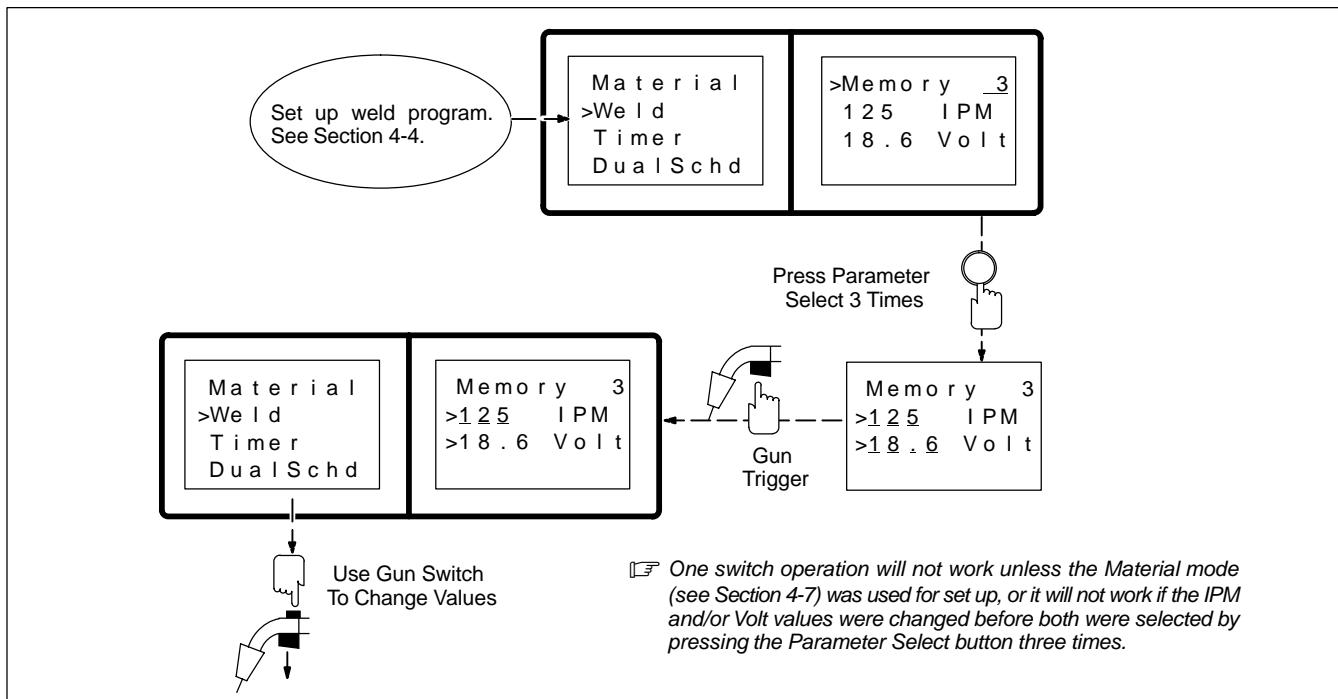

#### 4-10. Resetting Memory

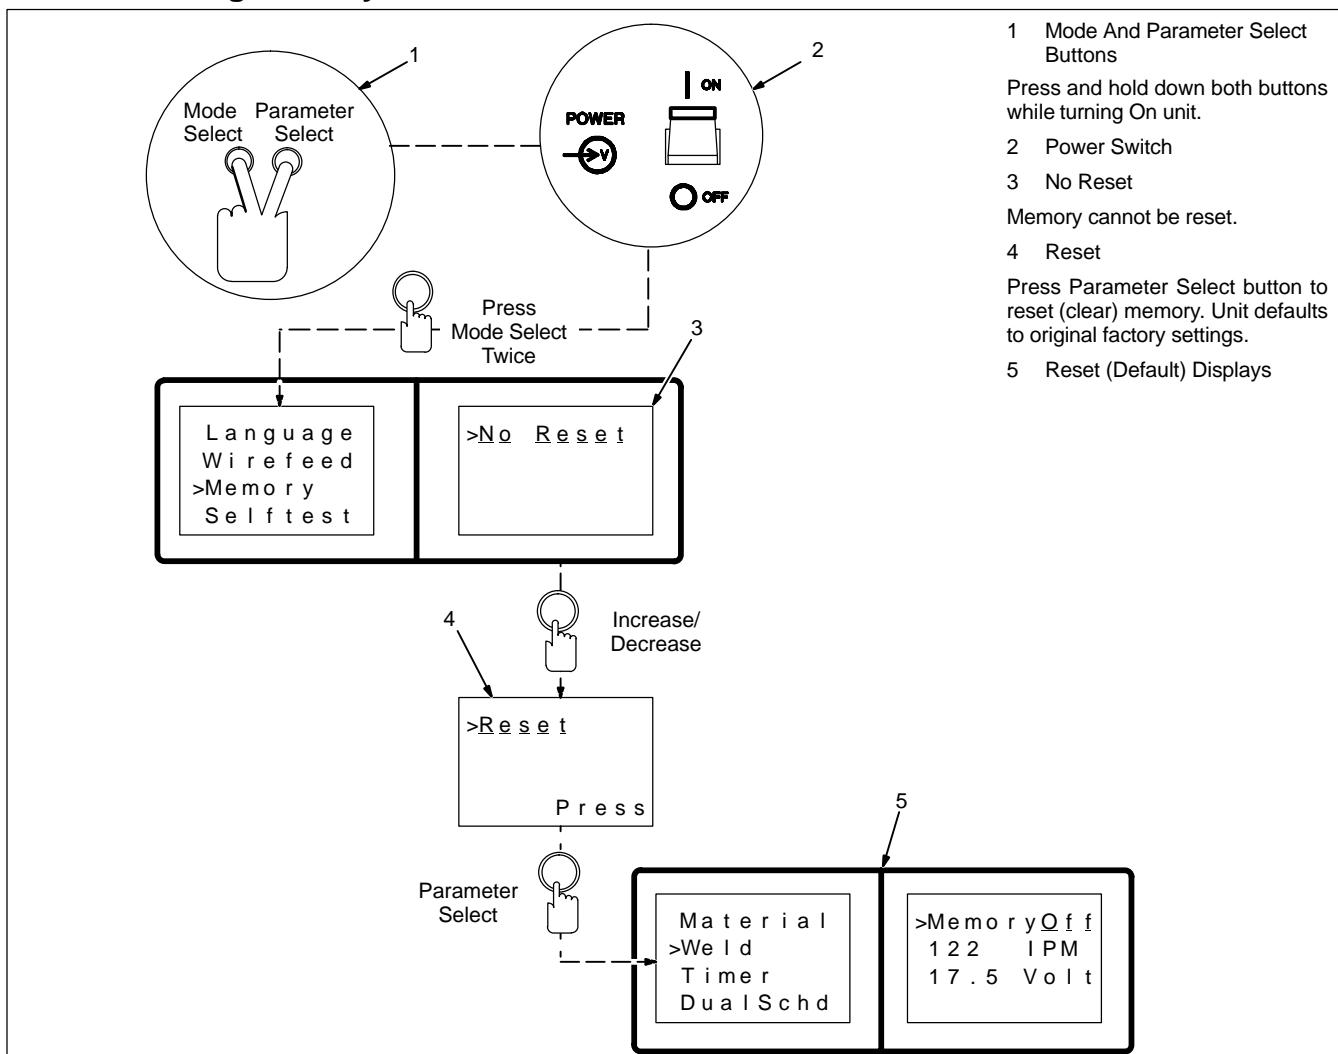

# SECTION 5 – MAINTENANCE AND TROUBLESHOOTING

## 5-1. Routine Maintenance


▲ Disconnect power before maintaining.

 **3 Months**

Replace unreadable labels.


 

Repair or replace cracked weld cable.


 

 **6 Months**

Clean and tighten weld terminals.

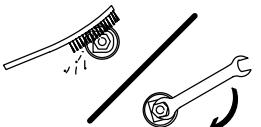


Blow out or vacuum inside. During heavy service clean monthly.

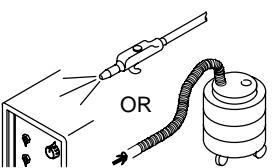

## 5-2. Circuit Breaker CB1

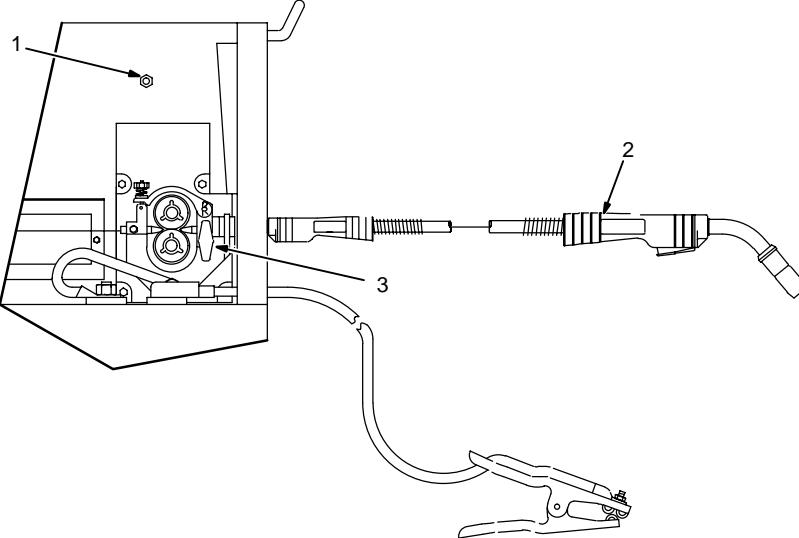


1 Circuit Breaker CB1  
If CB1 opens, wire feeding stops.  
2 Welding Gun  
Check gun liner for blockage or kinks.  
3 Wire Drive Assembly  
Check for jammed wire, binding drive gear or misaligned drive rolls.  
Allow cooling period and reset breaker. Close door.

Ref. ST-148 261-C


## 5-3. Unit Overload

If unit is used beyond capacity (excessive wire feed, shorted output, etc.), wire feeds but is not energized. Release gun trigger to reset this condition.

## 5-4. Replacing Gun Contact Tip

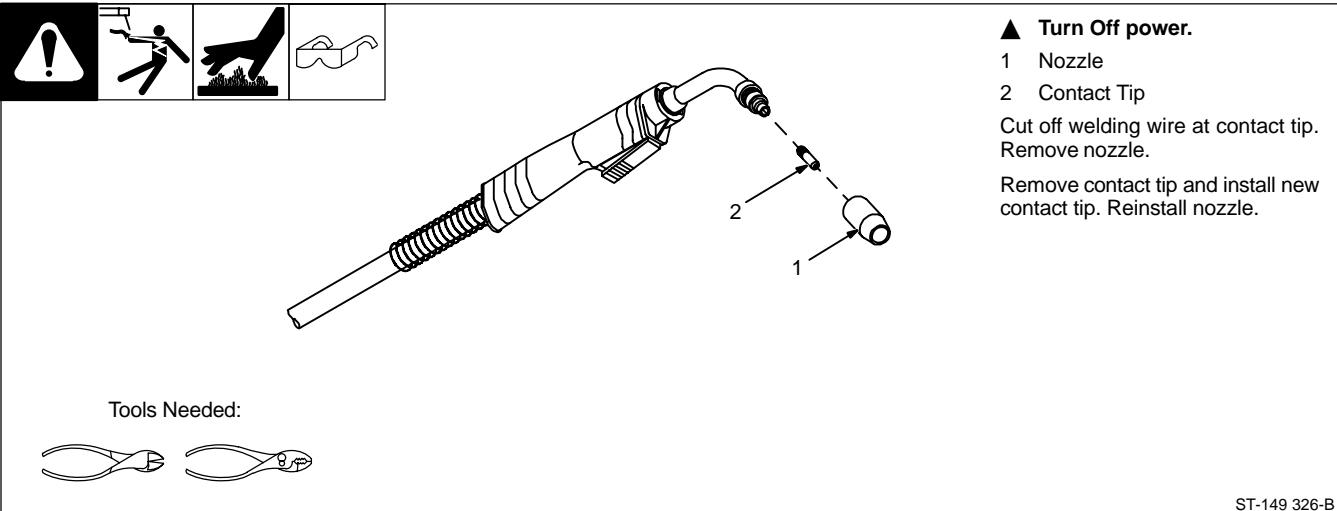


## 5-5. Aligning Drive Rolls And Wire Guide

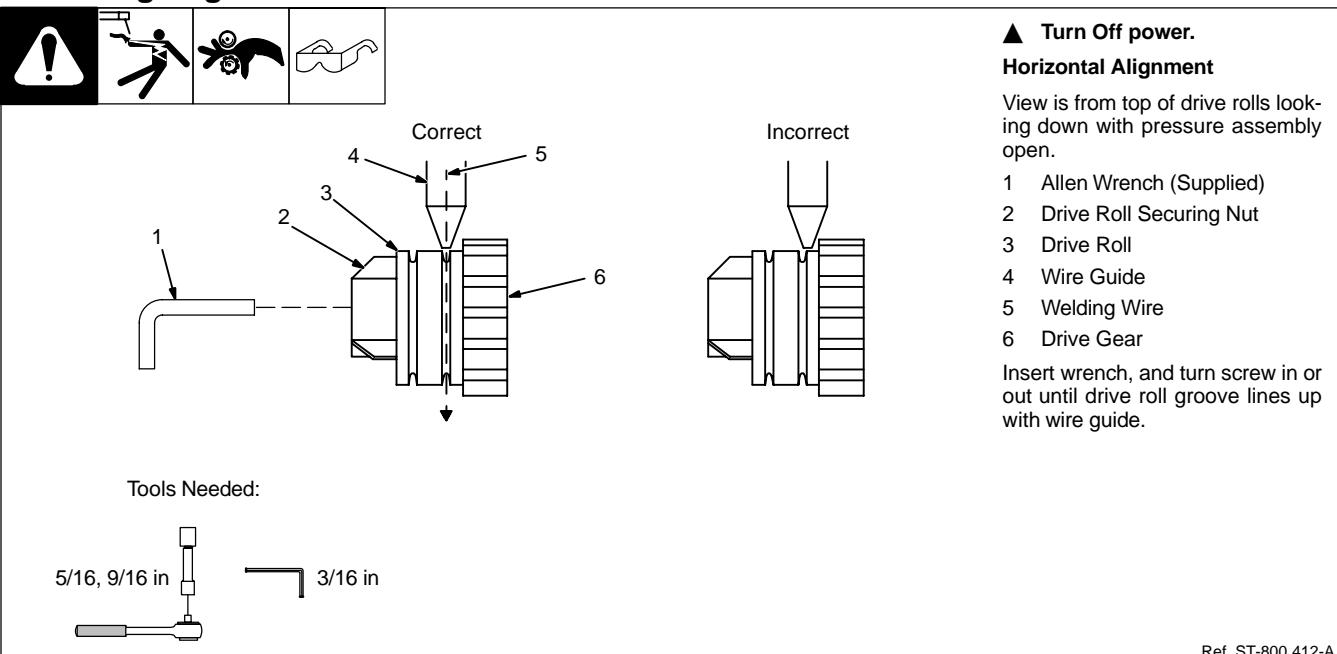

## 5-6. Unicable Repair



To repair or replace unicable, order Unicable Clamp Kit, part number 172 018.

## 5-7. Cleaning Or Replacing Gun Liner




▲ Disconnect gun first.

Tools Needed:

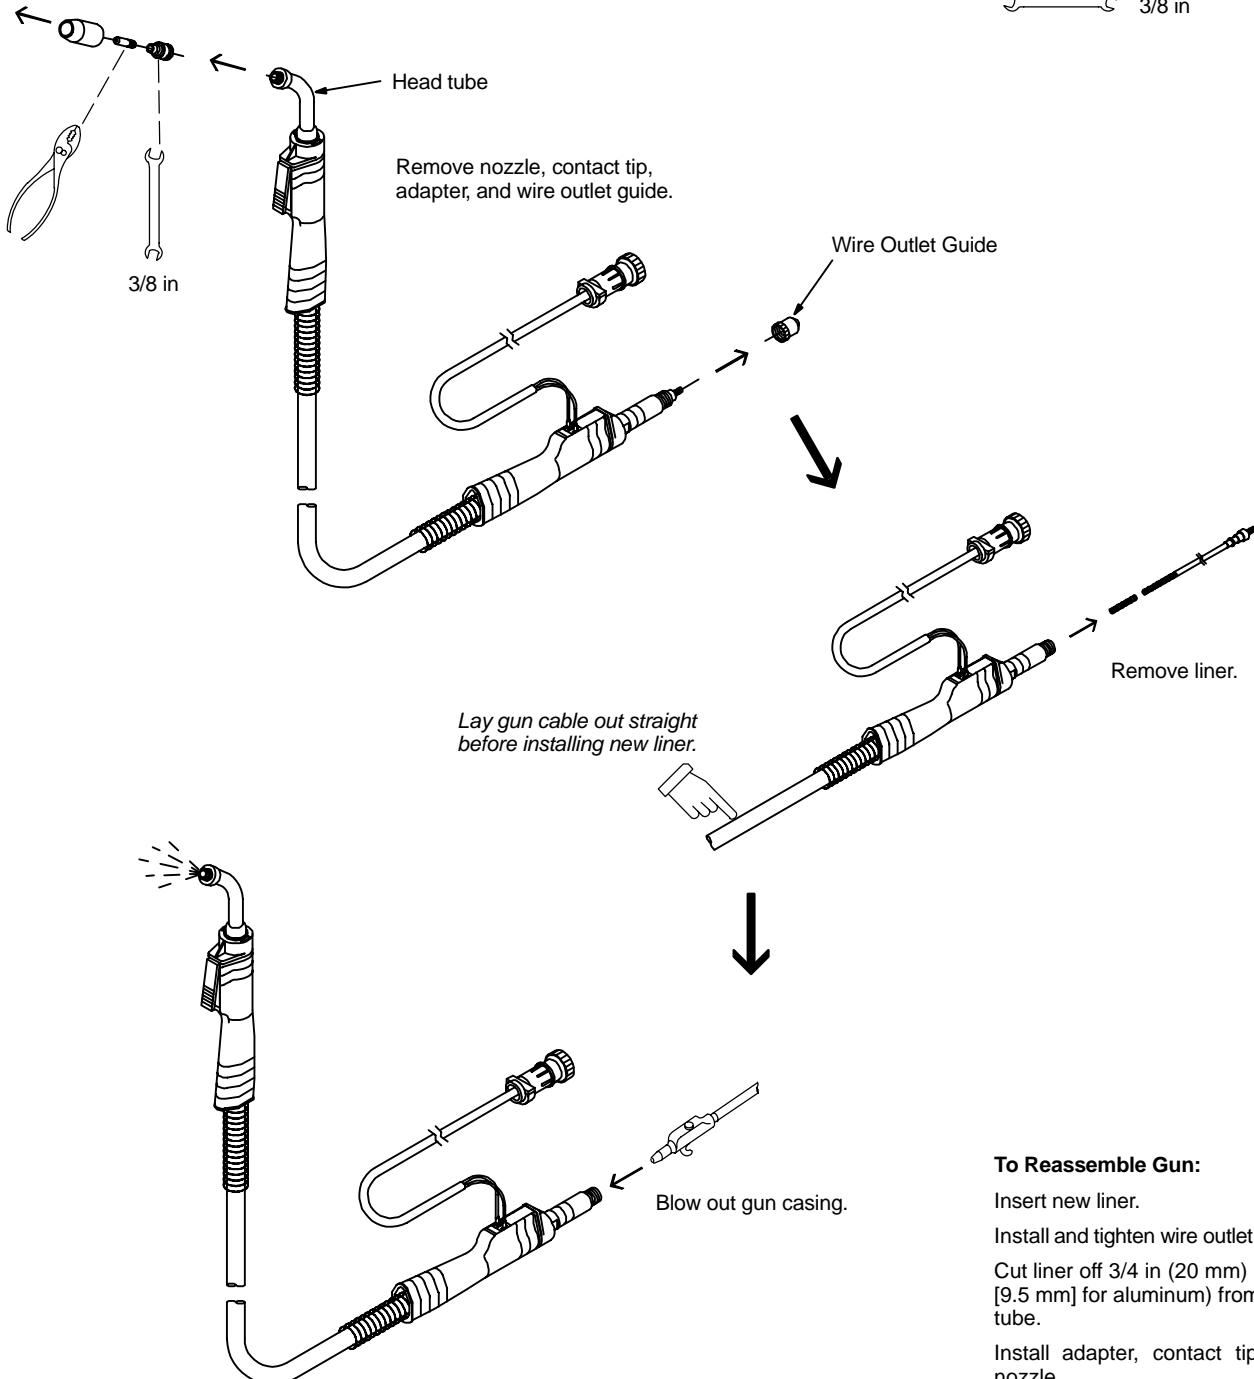

Ref. ST-800 797-A


## 5-8. Replacing Switch And/Or Head Tube

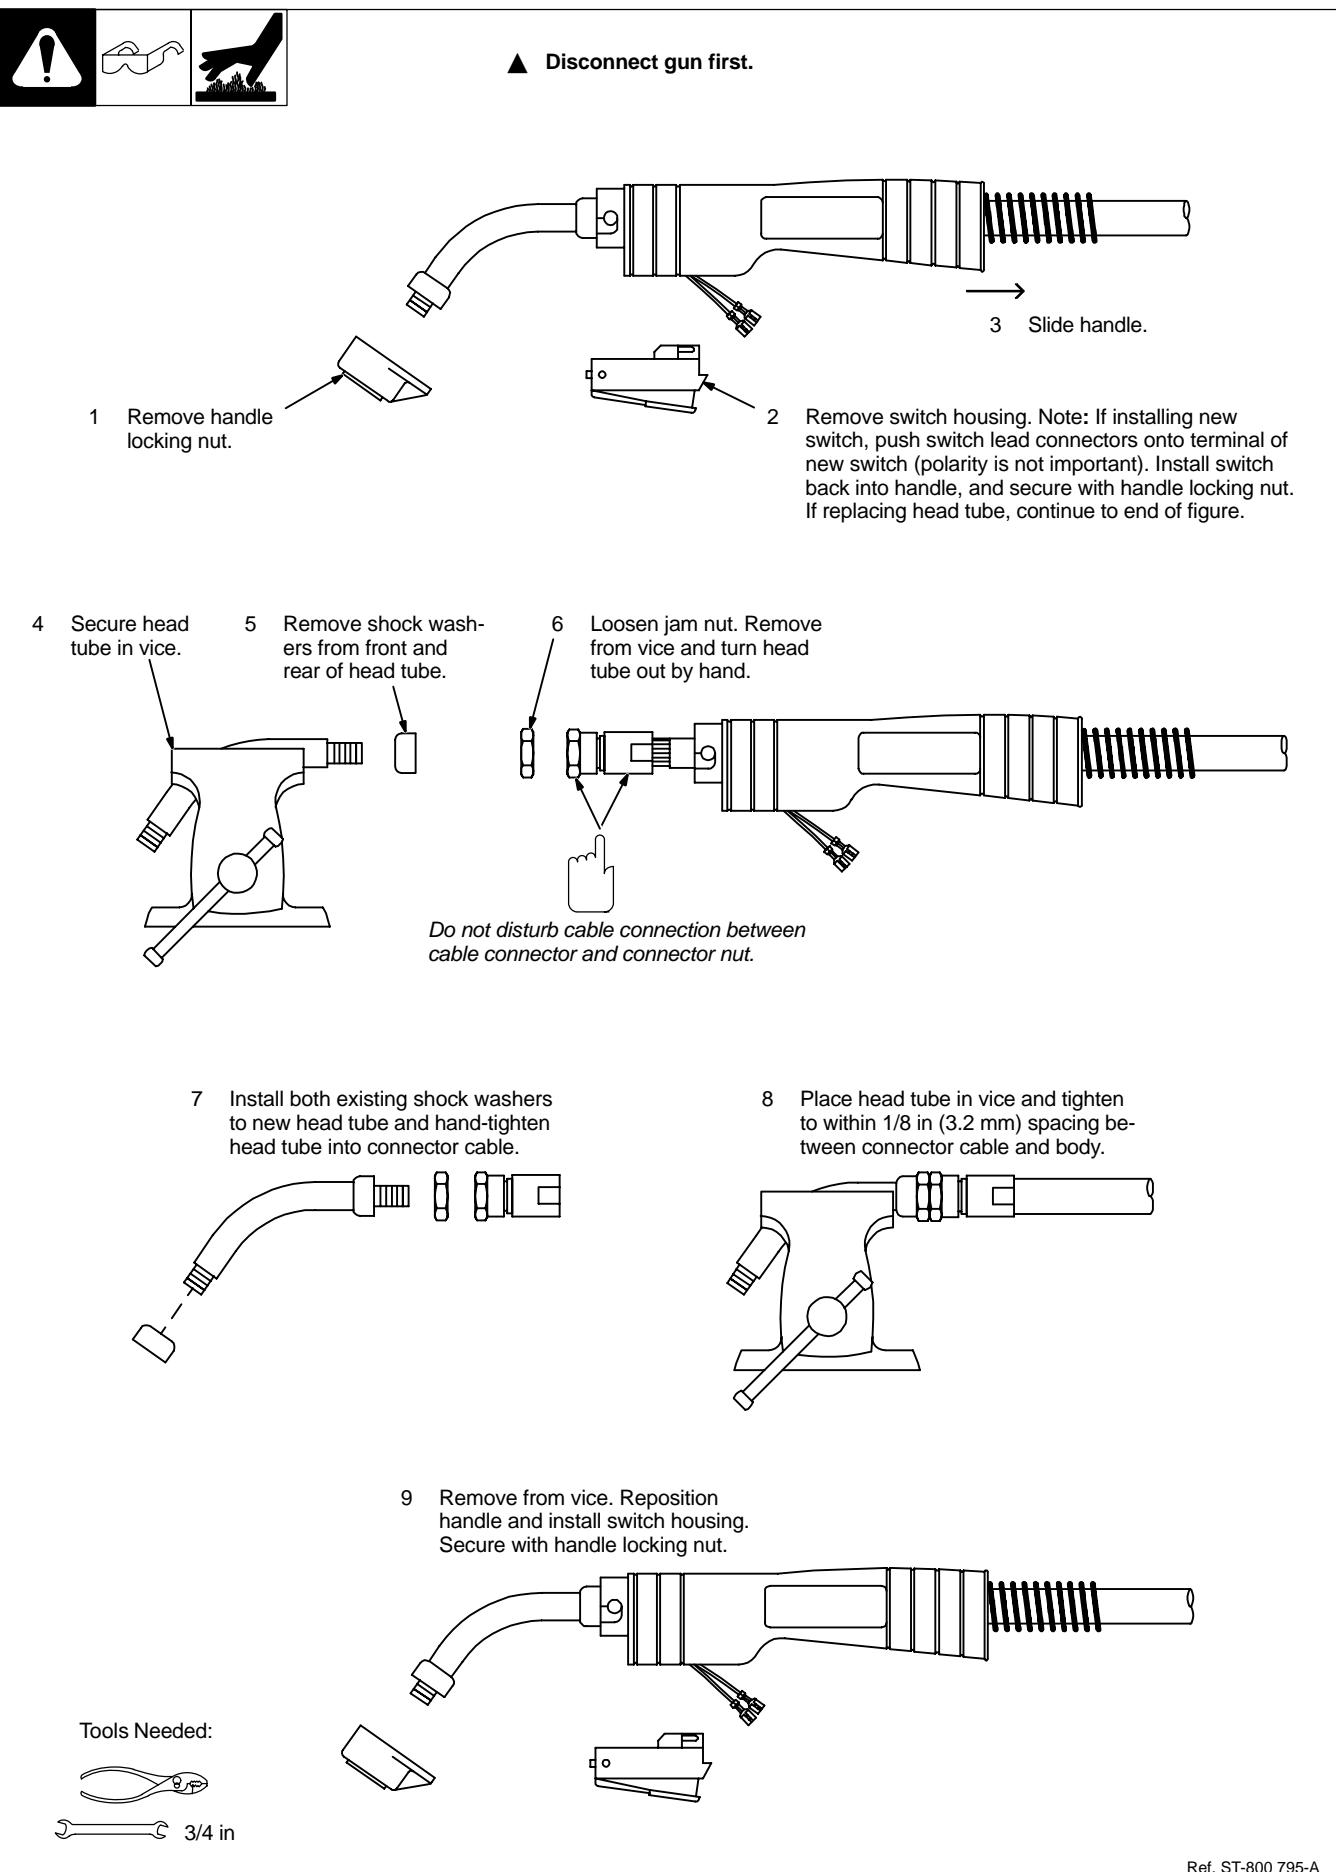

## 5-9. Troubleshooting

    				
Trouble	Remedy			
No weld output; wire does not feed.	Be sure line disconnect switch is On (see Section 2-12). Replace building line fuse or reset circuit breaker if open (see Section 2-12). Reset circuit breaker CB1 (see Section 5-2). Secure gun trigger connections (see Section 2-5). Check and replace Power switch if necessary. Have Factory Authorized Service Agent check all board connections and main control board.			
No weld output; wire feeds.	Thermostat TP1 open (overheating). Allow fan to run; the thermostat will close when the unit has cooled (see Section 2-2). Connect work clamp to get good metal to metal contact. Replace contact tip (see Section 5-4). An overload condition occurred. Release gun trigger (see Section 5-3). Have Factory Authorized Service Agent check main control board and main rectifier.			
Low weld output.	Connect unit to proper input voltage or check for low line voltage (see Section 2-12). Check input voltage jumper links and correct position if necessary (see Section 2-10). Have Factory Authorized Service Agent check main control board.			
Fan motor does not run. NOTE: Fan only runs when cooling is necessary.	Have Factory Authorized Service Agent check fan-on-demand circuit.			
Low, high, or erratic wire speed.	Reprogram microprocessor (see Section 3-1). Change to correct size drive rolls (see Section 2-8). Readjust drive roll pressure (see Section 2-13). Replace inlet guide, contact tip, and/or liner if necessary (see Sections 5-4, and 5-7). Check position of input jumper links (see Section 2-10). Have Factory Authorized Service Agent check main control board.			
No wire feed.	Reset circuit breaker CB1 (see Section 5-2). Reprogram microprocessor (see Section 3-1). Clear obstruction in gun contact tip or liner (see Sections 5-4 and 5-7). Readjust drive roll pressure (see Section 2-13). Change to correct size drive rolls (see Section 2-8). Rethread welding wire (see Section 2-13). Check gun trigger and leads. Repair or replace gun if necessary. Have Factory Authorized Service Agent check main control board.			
Poor weld bead, or welding wire is noodle welding.	Check polarity setting for type of welding wire being used (see Section 2-6).			


## 5-10. Selftest Procedure

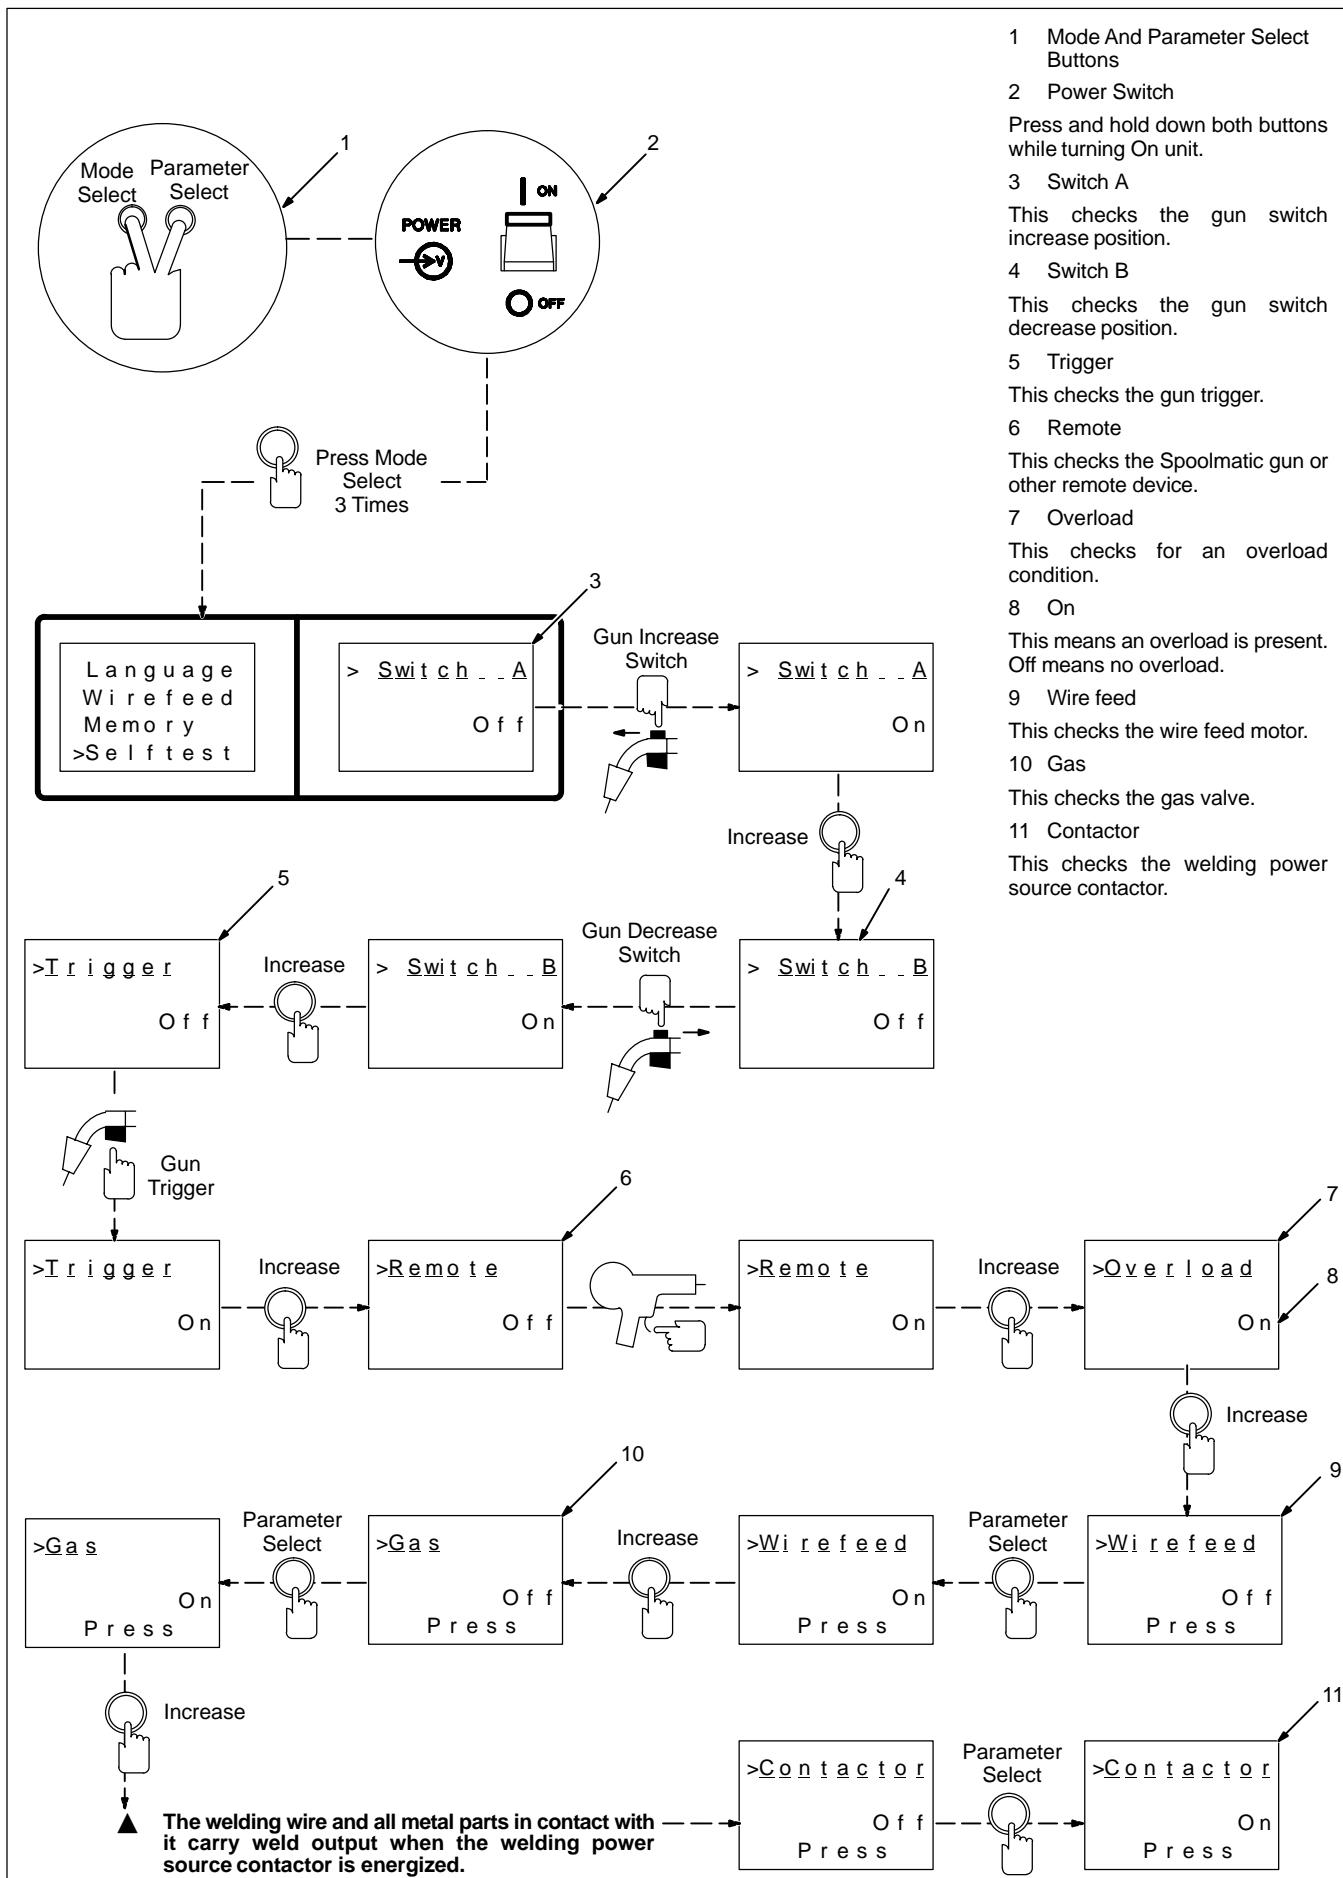

## 5-11. Troubleshooting Displays

Trouble	Remedy
Release Trigger displayed.	Release gun trigger.
	Check gun trigger and leads.
	There is high frequency in the area of the welder. Turn it off or move welder.
Release Remote displayed.	Release spool gun or remote control trigger.
	Check spool gun trigger and leads according to spool gun Owner's Manual.
	Check remote control switch and switch leads according to unit Owner's Manual.
	There is high frequency in the area of the welder. Turn it off or move welder.
Overload displayed.	Adjust weld parameters to reduce output.
	Keep contact tip from shorting to the workpiece.
	Thermal shutdown has occurred. Allow a cooling period (see Section 2-2).
	Have nearest Factory Authorized Service Agent check the microprocessor panel, capacitor bank, main rectifier, and main transformer.

## SECTION 6 – ELECTRICAL DIAGRAM

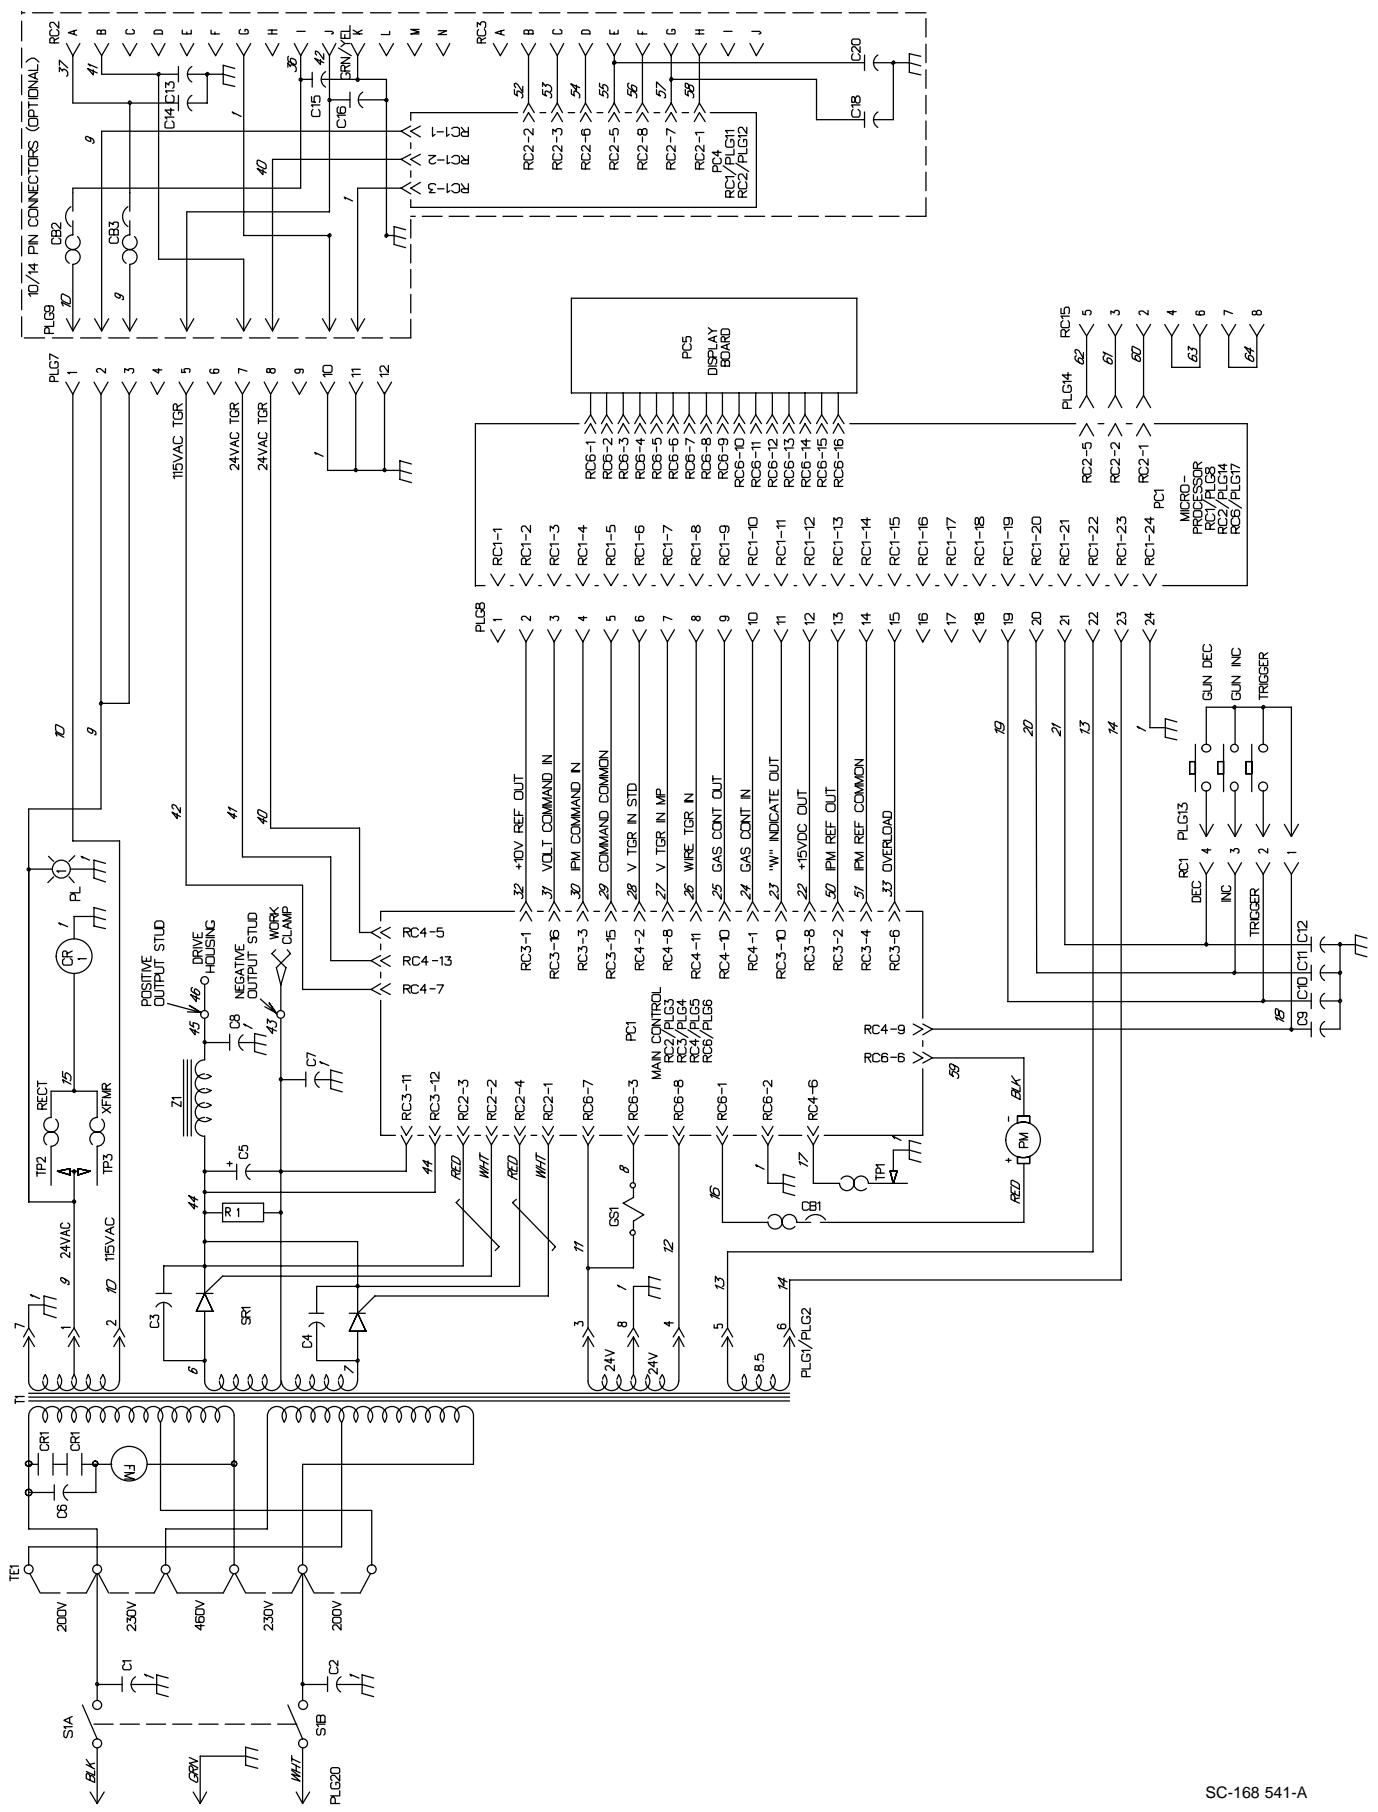

## Figure 6-1. Circuit Diagram

## SECTION 7 – PARTS LIST

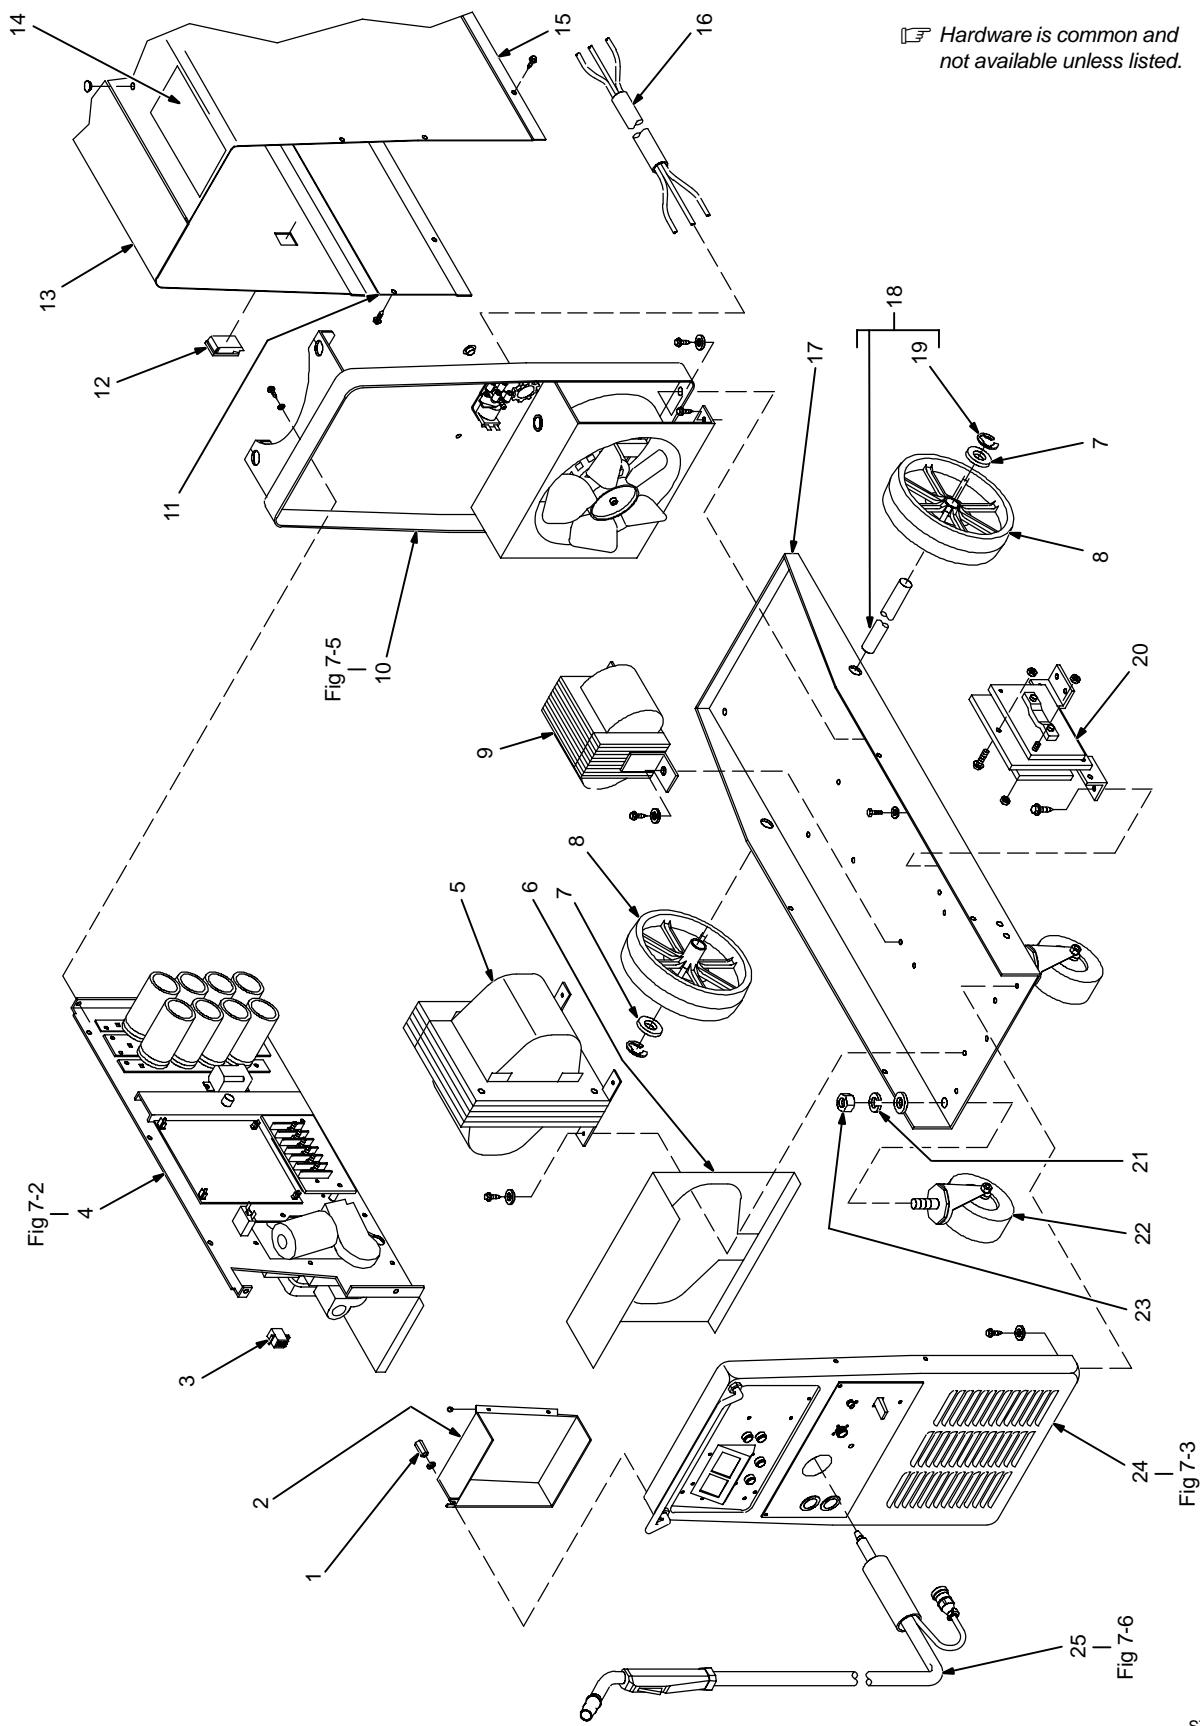



Figure 7-1. Main Assembly

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
<b>Figure 7-1. Main Assembly</b>				
... 1	...	148 597	COUPLER, rod threaded .312-18 x 1.000	1
... 2	...	146 168	PANEL, center enclosure	1
... 3	...	PLG7	HOUSING RECEPTACLE & SOCKETS	1
... 4	...	Fig 7-2	BAFFLE, center w/components	1
... 5	...	T1	TRANSFORMER, pwr main (200/230/460) (consisting of)	1
... 5	...	T1	TRANSFORMER, pwr main (230/460/575) (consisting of)	1
... 5	...	T1	TRANSFORMER, pwr main (220/380/415) (consisting of)	1
		143 853	COIL, pri/sec (200/230/460)	1
		150 326	COIL, pri/sec (230/460/575)	1
		150 314	COIL, pri/sec (220/380/415)	1
		TP3	THERMOSTAT, NO	1
... 6	...	150 387	BAFFLE, air transformer	1
... 7	...	602 250	WASHER, flat stl SAE .750	2
... 8	...	070 799	WHEEL, rubolene 10 in dia x 2.250 wide x .750 bore	2
... 9	...	Z1	STABILIZER, (60Hz)	1
... 9	...	Z1	STABILIZER, (50Hz)	1
... 10	...	Fig 7-5	PANEL, rear w/components	1
... 11	...	146 165	PANEL, side LH	1
... 12	...	089 899	LATCH, slide flush mtg hole 1.000 wide x 1.500 lg	2
... 13	...	+146 167	PANEL, side	1
		146 991	LABEL, weld parameters	1
... 14	...	134 464	LABEL, warning general precautionary	1
... 15	...	+170 513	WRAPPER	1
		117 860	BLANK, snap-in nyl .187mtg hole	2
... 16	...	PLG20	CORD SET, pwr 250V 8-10ga 3/c 600V 12ft (200/230V)	1
		039 778	RECEPTACLE, str 2P3W 50A 250V (200/230V only)	1
... 16	...	144 085	CORD SET, pwr 8-10ga 3/c 600V 12ft	1
... 17	...	146 161	BASE	1
... 18	...	052 692	AXLE, running gear (consisting of)	1
... 19	...	121 614	RING, retaining ext .750 shaft x .085grv depth	2
... 20	...	SR1	RECTIFIER, SCR main (consisting of)	1
		166 667	CLAMP, spring thyristor rectifier	1
		173 784	HEAT SINK, rectifier	2
... C3,4	...	031 689	CAPACITOR, rectifier	2
		143 818	THYRISTOR, SCR 325A 300V hockey puck	2
... TP1	...	154 243	THERMOSTAT, NC	1
		171 405	HEAT SINK, rectifier	1
		143 852	FOOT, mtg rectifier	2
... TP2	...	154 244	THERMOSTAT, NO	1
		173 714	CLAMP, thyristor rectifier	1
... 21	...	602 213	WASHER, lock stl split .375	2
... 22	...	008 999	CASTER, plstc swvl 4 in dia	2
... 23	...	601 871	NUT, stl hex jam .375-16	2
... 24	...	Fig 7-3	PANEL, front w/components	1
... 25	...	169 600	GUN, 12ft .030-.035 wire (Fig 7-6)	1
		182 137	REGULATOR/FLOWMETER, 10-50 CFH Argon/CO <sub>2</sub>	1
		144 108	HOSE, gas	1
		130 750	CLAMP, ground 350A	1
		600 318	CABLE, weld cop strd No. 3 (order by ft)	10ft

+When ordering a component originally displaying a precautionary label, the label should also be ordered.

**To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.**

 *Hardware is common and not available unless listed.*

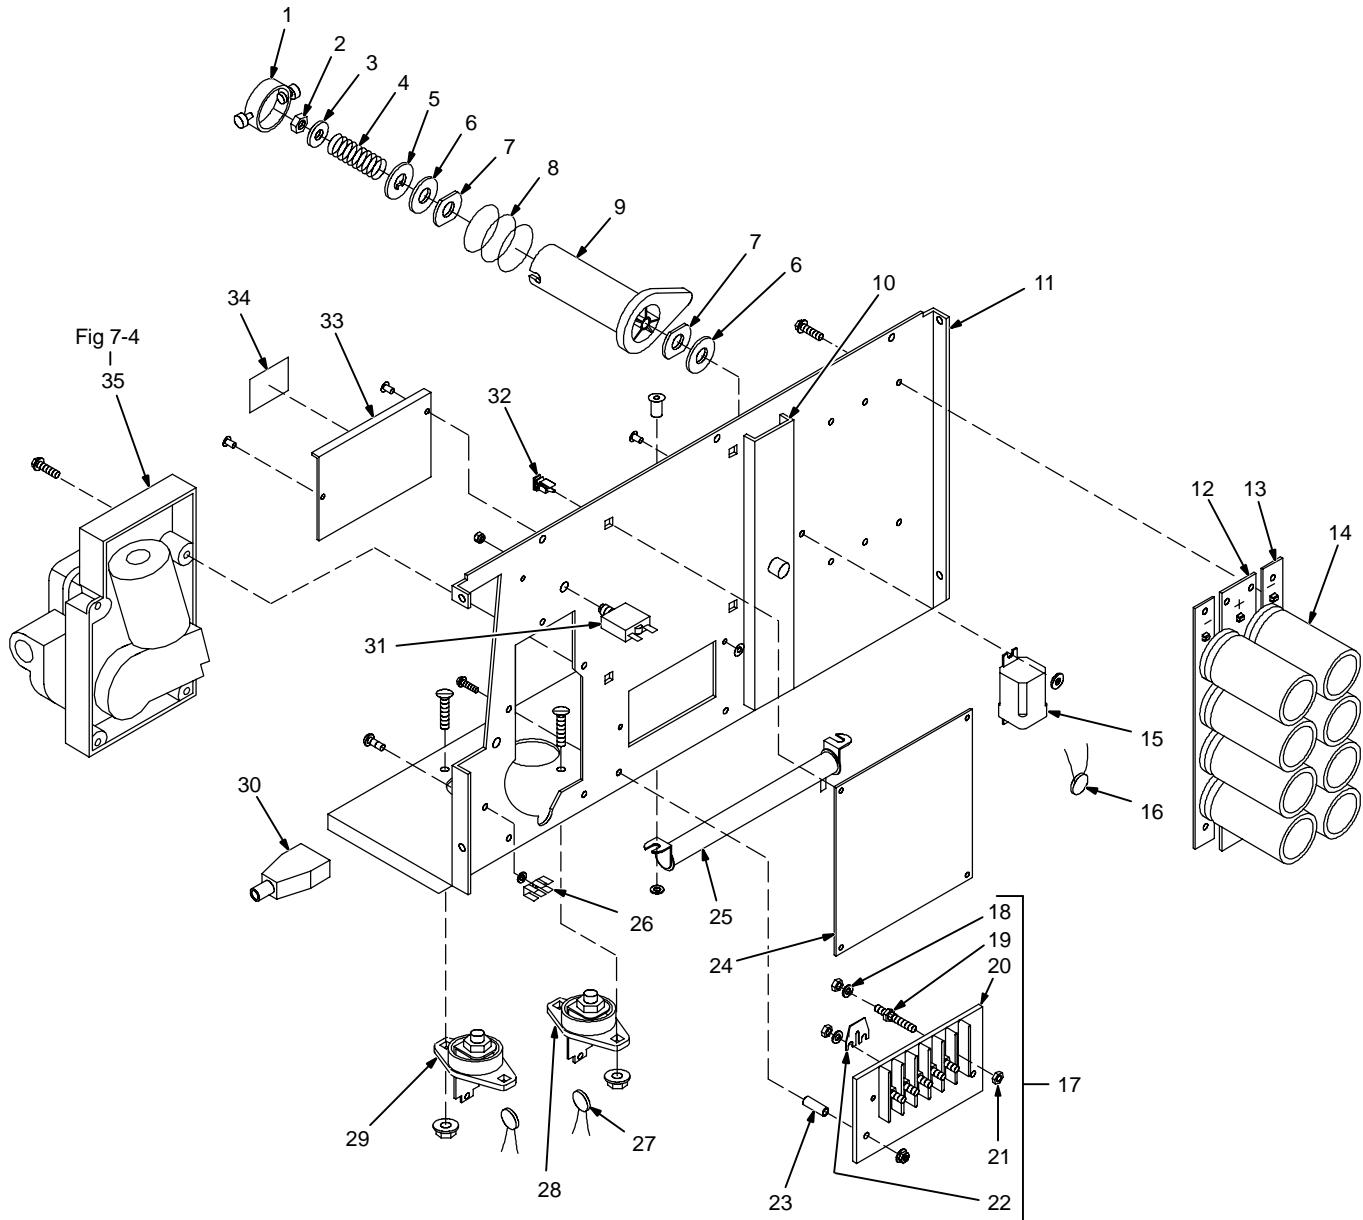

**Figure 7-2. Baffle, Center w/Components**

ST-148 325-C

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
----------	------------	----------	-------------	----------

Figure 7-2. Baffle, Center w/Components (Fig 7-1 Item 4)

.... 1	.....	058 427	.... RING, retaining spool .....	1
.... 2	.....	085 980	.... NUT, stl hex full .625-11 .....	1
.... 3	.....	605 941	.... WASHER, flat stl .640 ID x 1.000 OD x 14ga thk .....	1
.... 4	.....	057 543	.... SPRING, cprsn .845 OD x .091 wire x 1.500 .....	1
.... 5	.....	057 971	.... WASHER, flat stl keyed 1.500dia x .125thk .....	1
.... 6	.....	010 191	.... WASHER, fbr .656 ID x 1.500 OD x .125thk .....	2
.... 7	.....	058 628	.... WASHER, brake stl .....	2
.... 8	.....	057 745	.... SPRING, cprsn 2.430 OD x .090 wire x 2.500 .....	1
.... 9	.....	058 428	.... HUB, spool .....	1
.... 10	.....	177 307	.... REEL, support .....	1
.... 11	.....	174 813	.... BAFFLE, center .....	1
.....	.....	186 998	.... CAPACITOR KIT,(consisting of) .....	1
.... 12	.....	082 902	.... STRIP, mtg center capacitor .....	1
.... 13	.....	185 643	.... STRIP, mtg capacitors .....	2
.... 14	.... C5	184 584	.... CAPACITOR, elctlt 15000uf 45VDC .....	8
.....	.....	083 147	.... GROMMET, scr No. 8/10 panel hole .312sq .500 high .....	6
.....	.....	187 752	.... INSULATOR .....	1
.... 15	.... CR1	006 393	.... RELAY, encl 24VAC DPDT .....	1
.... 16	.... VR1	149 542	.... VARISTOR, 75 joule 350VDC .....	1
.... 17	.... TE1	143 911	.... TERMINAL ASSEMBLY, pri 1ph triple voltage (consisting of) .....	1
.... 18	.....	010 913	.... WASHER, flat brs .218 ID x .460 OD x .031thk .....	6
.... 19	.....	038 887	.... STUD, pri bd brs 10-32 x 1.375 .....	6
.... 20	.....	083 426	.... TERMINAL BOARD, pri .....	1
.... 21	.....	601 835	.... NUT, brs hex 10-32 .....	12
.... 22	.....	038 618	.... LINK, jumper term bd pri .....	2
.... 23	.....	010 199	.... TUBING, stl .275 ID x .048 wall x 1.000 lg .....	2
.... 24	.... PC1	184 316	.... CIRCUIT CARD, control main .....	1
.....	.... PLG3	115 094	.... HOUSING PLUG & SOCKETS .....	1
.....	.... PLG4	131 052	.... HOUSING RECEPTACLE & SOCKETS .....	1
.....	.... PLG5	131 056	.... HOUSING RECEPTACLE & SOCKETS .....	1
.....	.... PLG6	115 092	.... HOUSING PLUG & SOCKETS .....	1
.... 25	.... R1	119 998	.... RESISTOR, WW fxd 300W 5 ohm .....	1
.... 26	.... 1T	129 524	.... TERMINAL, frict male .250 x .032 3 pair .....	1
.... 27	.... C7,8	128 750	.... CAPACITOR .....	2
.... 28	.... POS	039 047	.... TERMINAL, pwr output red .....	1
.... 29	.... NEG	039 046	.... TERMINAL, pwr output black .....	1
.... 30	.....	071 971	.... COVER, cable .....	1
.... 31	.... CB1	123 745	.... CIRCUIT BREAKER, man reset 1P 4A 250VAC .....	1
.... 32	.....	134 201	.... STAND-OFF SUPPORT, PC card .....	4
.... 33	.....	+144 933	.... DOOR, access chgov .....	1
.... 34	.....	021 469	.... LABEL, danger high voltage .....	1
.... 35	.....	Fig 7-4	.... WIRE DRIVE & GEARS .....	1

+When ordering a component originally displaying a precautionary label, the label should also be ordered.


To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
----------	------------	----------	-------------	----------

Figure 7-3. Panel, Front w/Components (Fig 7-1 Item 24)

... 1	.....	147 582	LENSE, clear anti-glare .030 x 2.125 x 3.225	1
... 2	.....	147 791	BEZEL, LED	1
... 3	.....	182 021	LCD, w/ribbon cable	1
... 4	.....	PC1	CIRCUIT CARD, microprocessor	1
.....	PLG8	143 322	HOUSING, term hdr 24skt	1
.....	113 746	24	TERMINAL, female 1skt 24-18 wire	24
... 5	.....	143 974	HANDLE, running gear	1
... 6	.....	C9	LEAD ASSEMBLY, elect	1
... 6	.....	C10	LEAD ASSEMBLY, elect	1
... 6	.....	C11	LEAD ASSEMBLY, elect	1
... 6	.....	C12	LEAD ASSEMBLY, elect	1
... 7	.....	RC1	RECEPTACLE w/SOCKETS	1
... 8	.....	C1,2	CAPACITOR ASSEMBLY	2
... 9	.....	S1	SWITCH, tgl DPST 40A 600VAC	1
... 10	.....	174 814	PANEL, front	1
... 11	.....	PLATE, indicator lower (order by model and serial number)	1	
... 12	.....	PL1	LIGHT, ind white lens 28V	1
... 13	.....	057 357	BUSHING, snap-in nyl .937 ID x 1.125mtg hole	2
... 14	.....	144 844	STAND-OFF, No. 6-32 x .875 lg	5
... 15	.....	147 584	PANEL, front control	1
... 16	.....	144 127	COVER, opening module	1
... 17	.....	153 169	ACTUATOR, switch	4
... 18	.....	NAMEPLATE, (order by model and serial number)	1	

 Hardware is common and not available unless listed.

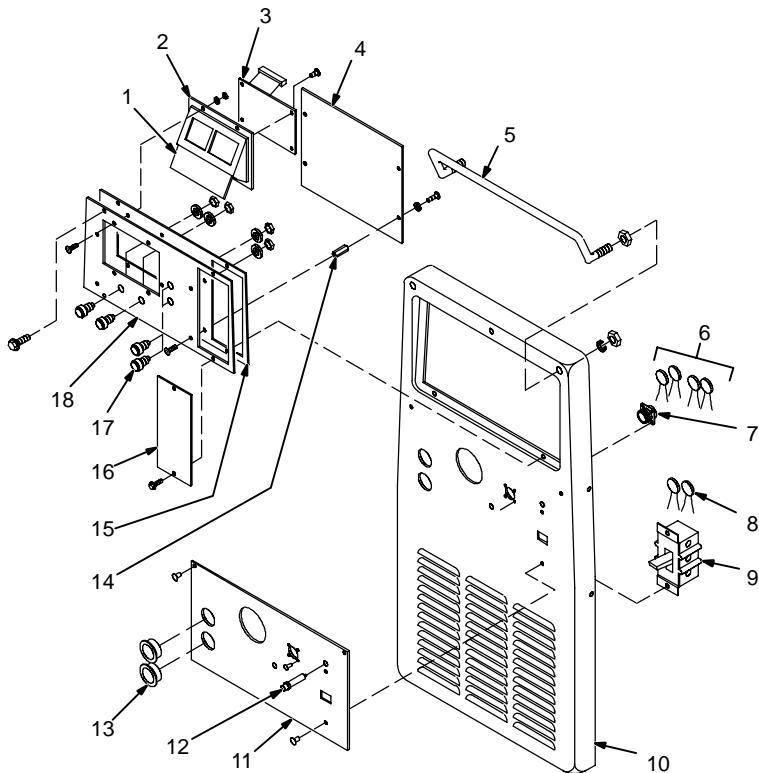

ST-148 326-C


Figure 7-3. Panel, Front w/Components

To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
<b>Figure 7-4. Wire Drive And Gears (Fig 7-2 Item 35)</b>				
1		602 009	SCREW, .250-20 x 1.25 soc hd gr 8	1
2		172 075	CARRIER, drive roll w/components	1
3		166 072	SPACER, gear	1
4		010 224	PIN, spring CS .187 x 1.000	1
5		182 788	HOUSING, adapter gun/feeder	1
6		085 242	FASTENER, pinned	1
7		085 244	WASHER, cupped stl .328 ID x .812 OD x .125 lip	1
8		010 231	SPRING, cprsn .770 OD x .105 wire x 1.225	1
9		085 243	KNOB, adj tension	1
10		166 071	LEVER, mtg pressure gear	1
11		079 634	PIN, hinge	1
12		151 828	PIN, cotter hair .054 x .750	2
13		173 616	COVER, right angle motor	1
14	PM	173 435	MOTOR, gear 24VDC 122RPM 20:1 ratio	1
15		079 633	FITTING, hose brs barbed M 3/16tbg	1
16		601 966	SCREW, .375-16 x 1.25hexhd	3
17		145 237	STOP, cover	1
18		604 538	WASHER, flat stl SAE .312	1
19		124 778	KNOB, plstc T 1.000 lg x .312-18 x 2.000 bar	1
20		173 619	CARRIER, drive roll w/components	1
21		174 609	SCREW, M 4-7 x 12 soc hd	1
22		174 610	SCREW, M 6-1.0 x 20 soc hd	3
23		173 620	BUSHING, motor mtg	3
		045 233	GUIDE, anti-wear	1
		010 287	WRENCH, hex	1

 *Hardware is common and not available unless listed.*

See Table 7-1 For  
Drive Roll & Wire Guide Kits.

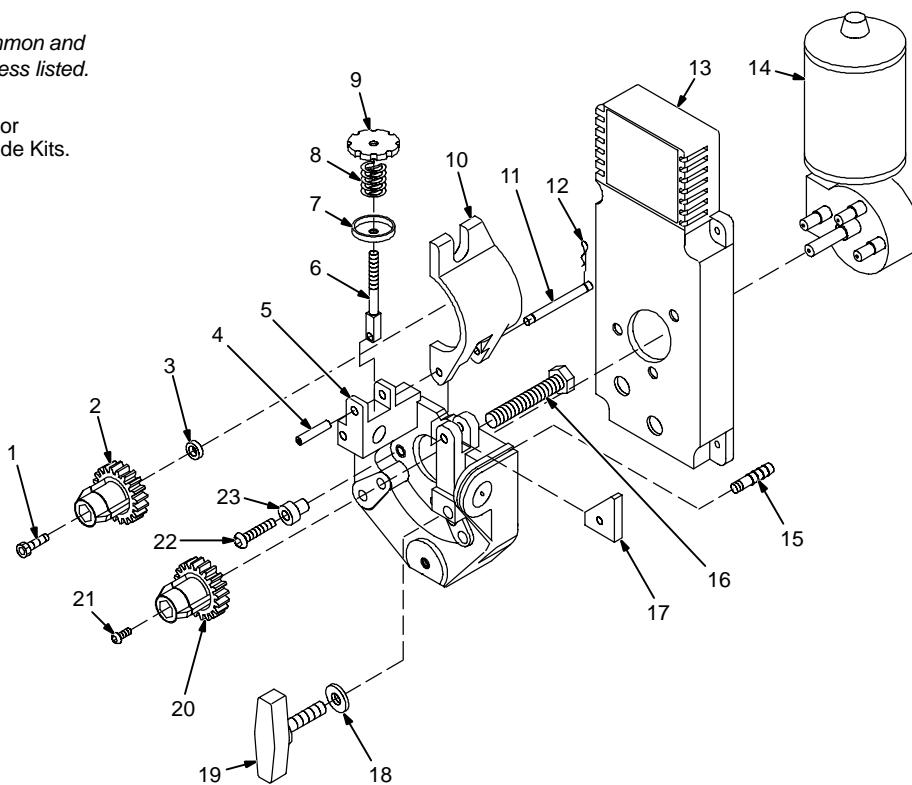

ST-148 529-C

**Figure 7-4. Wire Drive And Gears**

\*Recommended Spare Parts.

**To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.**

**Table 7-1. Drive Roll And Wire Guide Kits**

**Note** 

Base selection of drive rolls upon the following recommended usages:

- 1 V-Grooved rolls for hard wire.
- 2 U-Grooved rolls for soft and soft shelled cored wires.
- 3 U-Cogged rolls for extremely soft shelled wires (usually hard surfacing types).
- 4 V-Knurled rolls for hard shelled cored wires.
- 5 Drive roll types may be mixed to suit particular requirements (example: V-Knurled roll in combination with U-Grooved).

Wire Diameter			Kit No.	Drive Roll		Inlet Wire Guide
Fraction	Decimal	Metric		Part No.	Type	
.023/.025 in.	.023/.025 in.	0.6 mm	087 131	087 130	V-Grooved	056 192
.030 in.	.030 in.	0.8 mm	079 594	053 695	V-Grooved	056 192
.035 in.	.035 in.	0.9 mm	079 595	053 700	V-Grooved	056 192
.045 in.	.045 in.	1.2 mm	079 596	053 697	V-Grooved	056 193


Ref. S-0026-B/7-91

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
----------	------------	----------	-------------	----------

**Figure 7-5. Panel, Rear w/Components (Fig 7-1 Item 10)**

... 1	.....	134 834	... HOSE, SAE .187 ID x .410 OD (order by ft) .....	3ft
... 2	.....	149 332	... CLAMP, hose .405-.485clp dia slftng .....	2
... 3	... GS1	125 785	... VALVE, 24VAC 2 way custom port 1/8 orf .....	1
... 4	.....	143 810	... PANEL, rear .....	1
... 5	.....	169 654	... BRACKET, support tank .....	1
... 6	.....	602 387	... CHAIN, weldless 2/0 x 27.000 lg .....	1
... 7	.....	605 227	... NUT, nyl hex jam .750NPST .....	1
... 8	.....	044 426	... CONNECTOR, clamp cable .690/1.070 .....	1
... 9	.....	010 493	... BUSHING, snap-in nyl .625 ID x .875mtg hole .....	1
... 10	.....	148 242	... WINDTUNNEL, 9 in .....	1
... 11	... FM1	148 808	... MOTOR, fan 230V 1550RPM .312dia shaft .....	1
... 12	.....	148 809	... BLADE, fan 9 in 5wg 34deg .309 bore CCW .....	1
... 13	.....	049 399	... NUT, speed push-on-type .312 stud .625 OD x .456 ID .....	1

 *Hardware is common and not available unless listed.*

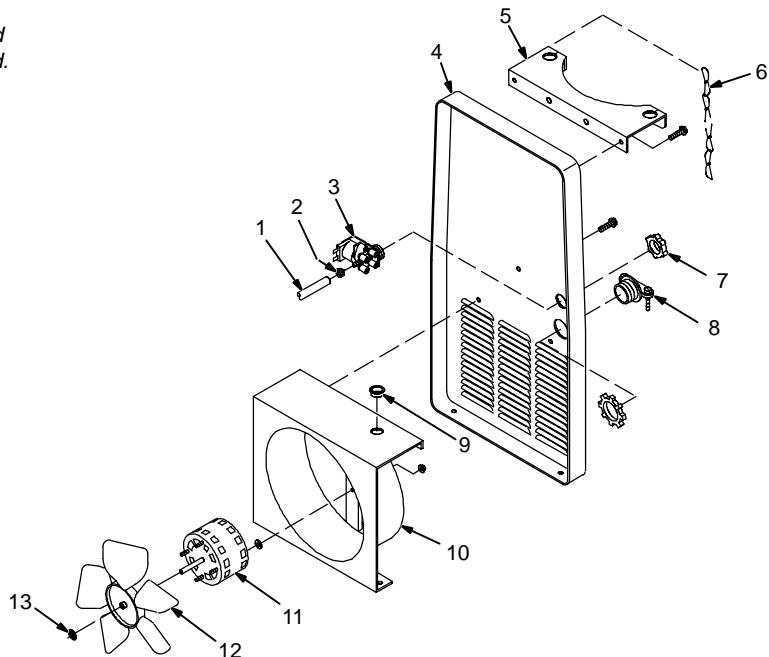

ST-148 327-C


**Figure 7-5. Panel, Rear w/Components**

**To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.**

Item No.	Part No.	Description	Quantity
----------	----------	-------------	----------

Figure 7-6. M-25M Gun (Fig 7-1 Item 25)

... 1	◆ 169 724	NOZZLE, slip type .500 orf .125 recess	1
... 1	◆ 169 725	NOZZLE, slip type .625 orf .125 recess	1
... 1	◆ 169 726	NOZZLE, slip type .625 orf flush	1
... 1	◆ 169 727	NOZZLE, slip type .625 orf .125 stickout	1
... 1	◆ 176 238	NOZZLE, spot flat	1
... 1	◆ 176 240	NOZZLE, spot inside corner	1
... 1	◆ 176 242	NOZZLE, spot outside corner	1
... 2	◆ 087 299	TIP, contact scr .023 wire x 1.125	2
... 2	◆ 000 067	TIP, contact scr .030 wire x 1.125	2
... 2	◆ 000 068	TIP, contact scr .035 wire x 1.125	2
... 2	◆ 000 069	TIP, contact scr .045 wire x 1.125	2
... 3	169 728	ADAPTER, contact tip	1
... 4	169 729	ADAPTER, nozzle	1
... 5	170 467	RING, retaining	1
... 6	170 468	O-RING	1
... 7	169 730	WASHER, shock	1
... 8	169 731	TUBE, head	1
... 9	169 738	NUT, locking handle	2
... 10	169 732	NUT, jam	2
... 11	169 733	CONNECTOR, cable	2
... 12	169 734	NUT, connector	2

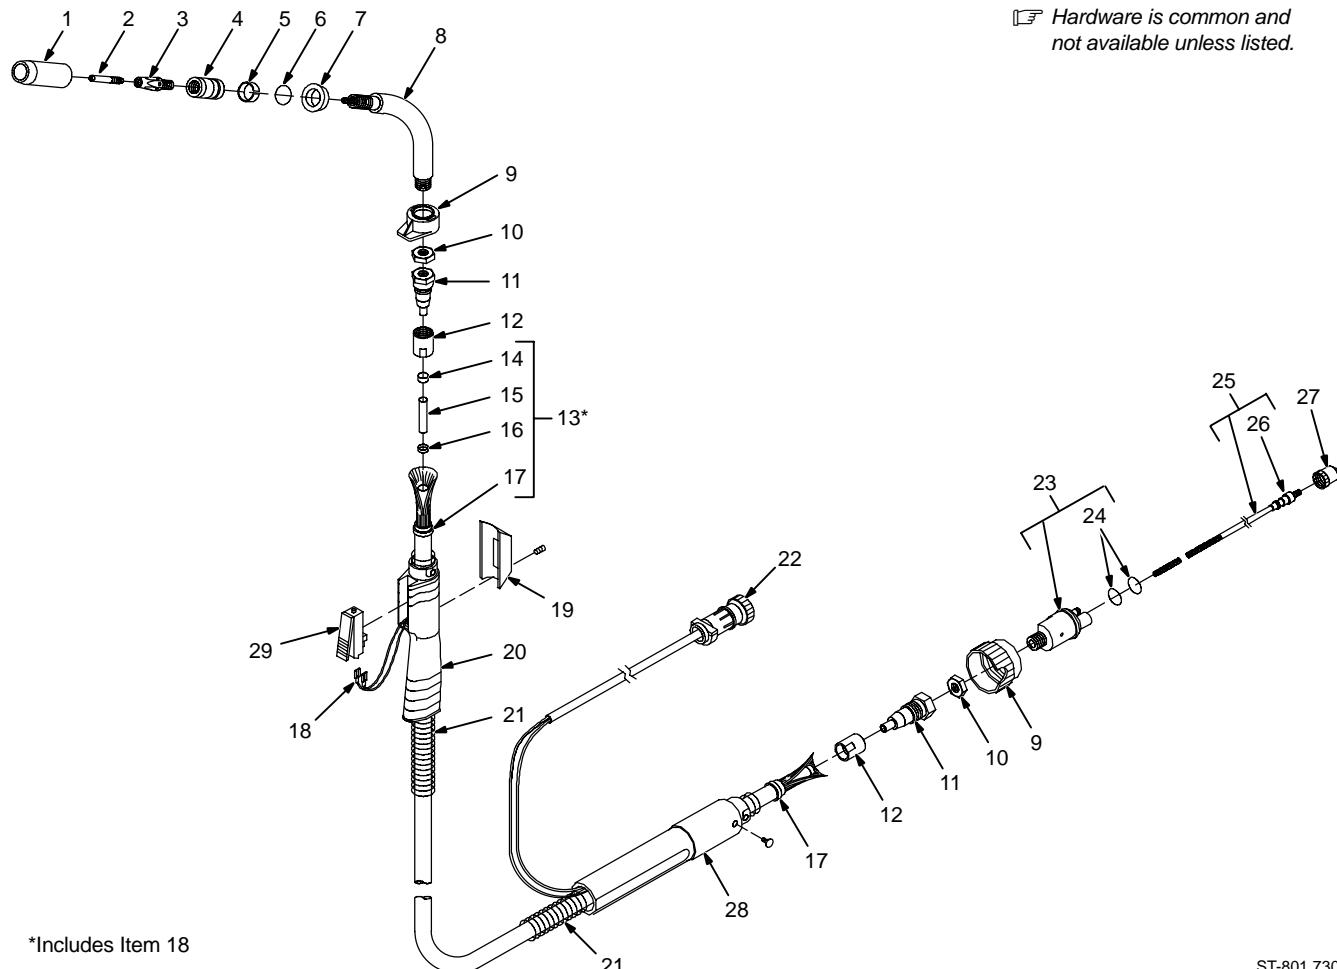

ST-801 730

Figure 7-6. M-25M Gun

Item No.	Part No.	Description	Quantity
<b>Figure 7-6. M-25M Gun (Fig 7-1 Item 25) (Continued)</b>			
... 13	172 018	... M25 UNICABLE CLAMP KIT, (consisting of)	2
... 14	169 735	... CLIP, compression	1
... 15	169 742	... TUBE, support	1
... 16	169 743	... CLAMP, inner	1
... 17	170 469	... CLAMP, jacket	1
... 18	169 746	... CONNECTOR, switch lead	2
... 19	172 690	... SWITCH ASSEMBLY, inc/dec	1
... 20	172 691	... HANDLE, (gun end)	1
	602 063	... SCREW, 4-40 x .250	1
... 21	169 741	... STRAIN RELIEF, cable	2
... 22	180 431	... CABLE, trigger	1
... 23	173 521	... CONNECTOR, feeder	1
... 24	079 974	... O-RING, .500 ID x .103CS rbr	2
... 25	◆ 172 257	... KIT, liner monocoil .023/.025 wire x 15ft	1
... 25	◆ 172 258	... KIT, liner monocoil .030/.035 wire x 15ft	1
... 26	079 975	... O-RING, .187 ID x .103CS rbr	1
... 27	169 723	... GUIDE, outlet	1
... 28	169 737	... HANDLE	1
... 29	169 739	... SWITCH, trigger	1

◆ OPTIONAL

To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

## Notes

## Notes

## Notes

## OPTIONS AND ACCESSORIES

### M40AL GUN (#169 608)

For welding with aluminum wire. Rated 525 amps at 60% duty cycle or 275 amps at 100% duty cycle using argon gas. Gun designed to run 3/64 in (1.2 mm) wire. 10 ft (3.0 m).

### SPOOLMATIC<sup>®</sup> 30A SPOOL GUN (#130 831)

Ideal for aluminum welding jobs. 200 amp, 100% duty cycle, air-cooled, 1 lb spool gun with 30 ft (9.1 m) cable assembly. Plugs into Receptacle Module 2. For detailed information, see Spoolmatic literature, Index No. M/1.2.

### RECEPTACLE MODULE

Required if welding with spool gun. Provides a convenient way for you to plug in Spoolmatic gun. Installs in less than 15 minutes.

### MODULE #2 (#042 607)

Use with Spoolmatic 30A and Spoolmatic 3.

*Note: Only one spool gun can be used at a time.*

### DUAL CYLINDER RACK (#042 758)

Converts single cylinder rack to a dual rack.

### GUN CABLE HOLDER (#042 701)

A convenient way to store gun and cable.

### GUN HOLDER (#042 710)

Installs onto side of power source. Provides convenient way to store gun when not in use.

### POWER CORD EXTENSION (#041 688)

25 ft (7.6 m) power cord extension with plug.

### REPLACEMENT GUNS

#### M25M FOR MILLERMATIC<sup>®</sup> 250MP

(#169 600) 12 ft (3.7 m)  
(#169 601) 15 ft (4.6 m)

Rated 300 amps at 60% duty cycle or 200 amps at 100% duty cycle using CO<sub>2</sub>. Gun is designed to run .030 – .035 in (0.8 – 0.9 mm) wire. The gun features an Increase/Decrease switch to easily fine tune weld parameters while welding.

# TRUE BLUE®

## WARRANTY

Effective January 1, 2000

(Equipment with a serial number preface of "LA" or newer)

This limited warranty supersedes all previous Miller warranties and is exclusive with no other guarantees or warranties expressed or implied.

### Warranty Questions?

Call  
1-800-4-A-MILLER  
for your local  
Miller distributor.

Your distributor also gives  
you ...

### Service

You always get the fast,  
reliable response you  
need. Most replacement  
parts can be in your  
hands in 24 hours.

### Support

Need fast answers to the  
tough welding questions?  
Contact your distributor.  
The expertise of the  
distributor and Miller is  
there to help you, every  
step of the way.

**LIMITED WARRANTY** — Subject to the terms and conditions below, Miller Electric Mfg. Co., Appleton, Wisconsin, warrants to its original retail purchaser that new Miller equipment sold after the effective date of this limited warranty is free of defects in material and workmanship at the time it is shipped by Miller. **THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.**

Within the warranty periods listed below, Miller will repair or replace any warranted parts or components that fail due to such defects in material or workmanship. Miller must be notified in writing within thirty (30) days of such defect or failure, at which time Miller will provide instructions on the warranty claim procedures to be followed.

Miller shall honor warranty claims on warranted equipment listed below in the event of such a failure within the warranty time periods. All warranty time periods start on the date that the equipment was delivered to the original retail purchaser, or one year after the equipment is sent to a North American distributor or eighteen months after the equipment is sent to an International distributor.

1. 5 Years Parts – 3 Years Labor
  - \* Original main power rectifiers
  - \* Inverters (input and output rectifiers only)
2. 3 Years — Parts and Labor
  - \* Transformer/Rectifier Power Sources
  - \* Plasma Arc Cutting Power Sources
  - \* Semi-Automatic and Automatic Wire Feeders
  - \* Inverter Power Supplies
  - \* Intellitig
  - \* Engine Driven Welding Generators  
**(NOTE: Engines are warranted separately by the engine manufacturer.)**
3. 1 Year — Parts and Labor
  - \* DS-2 Wire Feeder
  - \* Motor Driven Guns (w/exception of Spoolmate 185 & Spoolmate 250)
  - \* Process Controllers
  - \* Positioners and Controllers
  - \* Automatic Motion Devices
  - \* RFCS Foot Controls
  - \* Induction Heating Power Sources
  - \* Water Coolant Systems
  - \* HF Units
  - \* Grids
  - \* Maxstar 140
  - \* Spot Welders
  - \* Load Banks
  - \* Miller Cyclomatic Equipment
  - \* Running Gear/Trailers
  - \* Plasma Cutting Torches (except APT & SAF Models)  
**(NOTE: Field options are covered under True Blue® for the remaining warranty period of the product they are installed in, or for a minimum of one year — whichever is greater.)**
  - \* Field Options
4. 6 Months — Batteries
5. 90 Days — Parts
  - \* MIG Guns/TIG Torches
  - \* Induction Heating Coils and Blankets

- \* APT, ZIPCUT & PLAZCUT Model Plasma Cutting Torches
- \* Remote Controls
- \* Accessory Kits
- \* Replacement Parts (No labor)
- \* Spoolmate 185 & Spoolmate 250
- \* Canvas Covers

Miller's True Blue® Limited Warranty shall not apply to:

1. **Consumable components; such as contact tips, cutting nozzles, contactors, brushes, slip rings, relays or parts that fail due to normal wear.**
2. Items furnished by Miller, but manufactured by others, such as engines or trade accessories. These items are covered by the manufacturer's warranty, if any.
3. Equipment that has been modified by any party other than Miller, or equipment that has been improperly installed, improperly operated or misused based upon industry standards, or equipment which has not had reasonable and necessary maintenance, or equipment which has been used for operation outside of the specifications for the equipment.

**MILLER PRODUCTS ARE INTENDED FOR PURCHASE AND USE BY COMMERCIAL/INDUSTRIAL USERS AND PERSONS TRAINED AND EXPERIENCED IN THE USE AND MAINTENANCE OF WELDING EQUIPMENT.**

In the event of a warranty claim covered by this warranty, the exclusive remedies shall be, at Miller's option: (1) repair; or (2) replacement; or, where authorized in writing by Miller in appropriate cases, (3) the reasonable cost of repair or replacement at an authorized Miller service station; or (4) payment of or credit for the purchase price (less reasonable depreciation based upon actual use) upon return of the goods at customer's risk and expense. Miller's option of repair or replacement will be F.O.B., Factory at Appleton, Wisconsin, or F.O.B. at a Miller authorized service facility as determined by Miller. Therefore no compensation or reimbursement for transportation costs of any kind will be allowed.

**TO THE EXTENT PERMITTED BY LAW, THE REMEDIES PROVIDED HEREIN ARE THE SOLE AND EXCLUSIVE REMEDIES. IN NO EVENT SHALL MILLER BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOSS OF PROFIT), WHETHER BASED ON CONTRACT, TORT OR ANY OTHER LEGAL THEORY.**

**ANY EXPRESS WARRANTY NOT PROVIDED HEREIN AND ANY IMPLIED WARRANTY, GUARANTY OR REPRESENTATION AS TO PERFORMANCE, AND ANY REMEDY FOR BREACH OF CONTRACT TORT OR ANY OTHER LEGAL THEORY WHICH, BUT FOR THIS PROVISION, MIGHT ARISE BY IMPLICATION, OPERATION OF LAW, CUSTOM OF TRADE OR COURSE OF DEALING, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE, WITH RESPECT TO ANY AND ALL EQUIPMENT FURNISHED BY MILLER IS EXCLUDED AND DISCLAIMED BY MILLER.**

Some states in the U.S.A. do not allow limitations of how long an implied warranty lasts, or the exclusion of incidental, indirect, special or consequential damages, so the above limitation or exclusion may not apply to you. This warranty provides specific legal rights, and other rights may be available, but may vary from state to state.

In Canada, legislation in some provinces provides for certain additional warranties or remedies other than as stated herein, and to the extent that they may not be waived, the limitations and exclusions set out above may not apply. This Limited Warranty provides specific legal rights, and other rights may be available, but may vary from province to province.



# Owner's Record

Please complete and retain with your personal records.

Model Name

Serial/Style Number

Purchase Date

(Date which equipment was delivered to original customer.)

Distributor

Address

City

State

Zip



## For Service

**Call 1-800-4-A-Miller or see our website at [www.MillerWelds.com](http://www.MillerWelds.com) to locate a DISTRIBUTOR or SERVICE AGENCY near you.**

Always provide Model Name and Serial/Style Number.

Contact your Distributor for:

Welding Supplies and Consumables  
Options and Accessories  
Personal Safety Equipment  
Service and Repair  
Replacement Parts  
Training (Schools, Videos, Books)  
Technical Manuals (Servicing Information and Parts)  
Circuit Diagrams  
Welding Process Handbooks

Contact the Delivering Carrier for:

For assistance in filing or settling claims, contact your distributor and/or equipment manufacturer's Transportation Department.

### Miller Electric Mfg. Co.

An Illinois Tool Works Company  
1635 West Spencer Street  
Appleton, WI 54914 USA

### International Headquarters—USA

USA Phone: 920-735-4505 Auto-Attended  
USA & Canada FAX: 920-735-4134  
International FAX: 920-735-4125

### European Headquarters –

**United Kingdom**  
Phone: 44 (0) 1204-593493  
FAX: 44 (0) 1204-598066

[www.MillerWelds.com](http://www.MillerWelds.com)